

hydraulic diagram




PM2V 5/80 a-byB-pm-s

with release hand knob
with automatic control for the 1st speed
with pressure relief valve and pressure-gauge prearrangement
two speed hand pump for a single acting cylinder
for fixing to tank



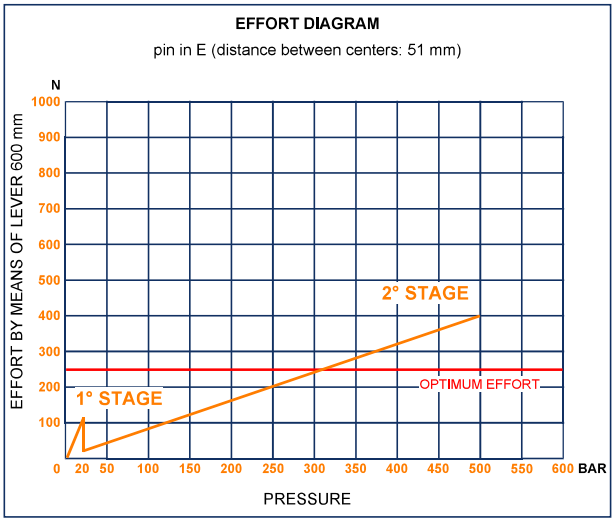

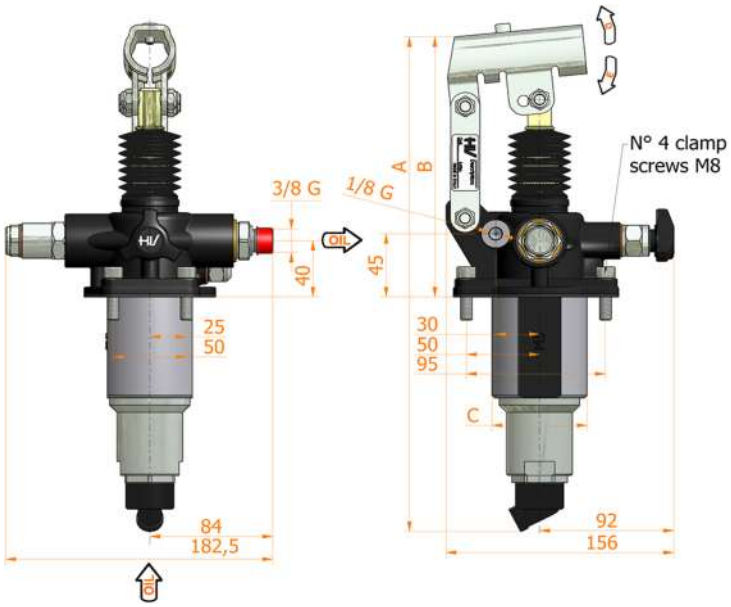

Specifications:

- Cast iron body
- Piston treated with Niploy
- White zinc plated support lever
- Lever connection Ø 27
- White zinc plated external parts
- Standard colour black
- Oil tank mounting kit included
- Pressure relief valve standard setting: 400 bar
- With pressure-gauge prearrangement, connection: 1/4 G

DISPLACEMENT cm³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm³		PRESSURE BAR		MASS KG	CODE WITHOUT BELLOWS	CODE WITH BELLOWS
						STAGE 1	STAGE 2	STAGE 1	STAGE 2			
5-80	354	185	65	30	32	80,588	5,036	20	500	6,200	6071.0110	6071.0137

HV Hydraulic S.r.l.
www.hvhydraulic.com - info@hvhydraulic.com
Via dell'Agricoltura, 162 - Loc. Castelletto di Serravalle - 40053 Valsamoggia (BO) Italy - Tel. +39 051 670.50.11 - Fax +39 051 670.53.74

© ALL RIGHTS RESERVED