
hydraulic diagram

# PMP 20 e-s


without release hand knob
double acting hand pump for single acting cylinder
for fixing to wall





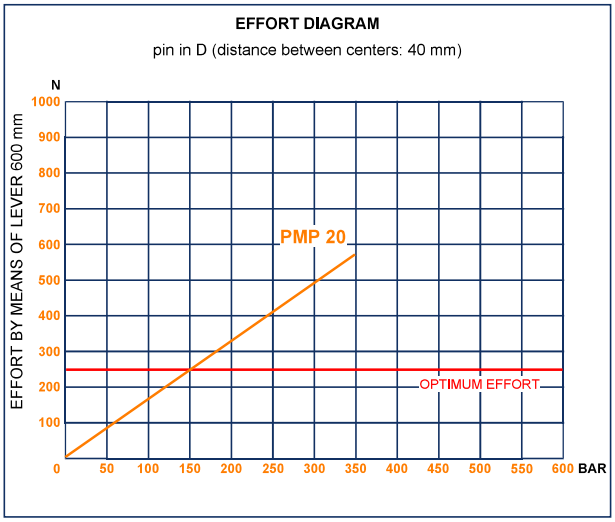



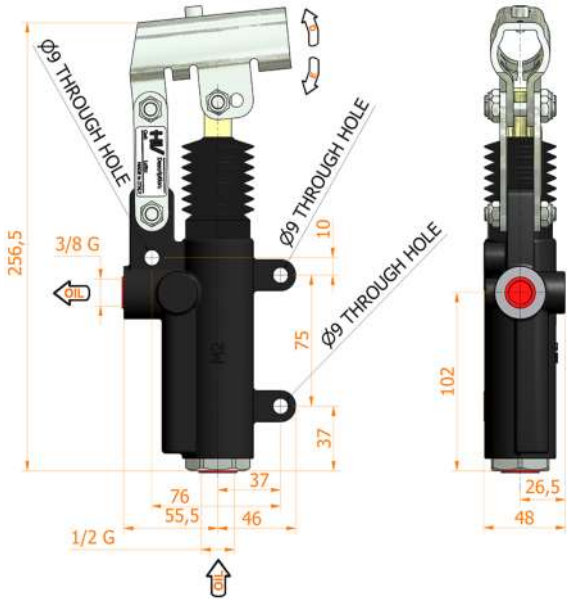


**Specifications:**

- Cast iron body
- Piston treated with Niploy
- White zinc plated support lever
- Lever connection Ø 27
- White zinc plated external parts
- Standard colour black

| DISPLACEMENT cm³ | A mm | B mm | C mm | D ° | E ° | ACTUAL DISPLACEMENT cm³ | PRESSURE BAR | | MASS KG | CODE WITHOUT BELLOWS | CODE WITH BELLOWS |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | OPTIMAL | MAX | | | |
| 20 | -- | -- | -- | 32 | 30 | 20,090 | 150 | 350 | 2,650 | 6074.0055 | 6074.0060 |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

**HV Hydraulic S.r.l.**
www.hvhydraulic.com - info@hvhydraulic.com
Via dell'Agricoltura, 162 - Loc. Castelletto di Serravalle - 40053 Valsamoggia (BO) Italy - Tel. +39 051 670.50.11 - Fax +39 051 670.53.74

© ALL RIGHTS RESERVED