Return filters

RFEX series

Maximum working pressure up to 1.6 MPa (16 bar) - Flow rate up to 260 l/min



ELIXIR®

Lighter, easier to use, and kinder to the environment - MP Filtri's new ELIXIR low pressure concept filters have been specially designed for in-line connections and to handle working pressures up to 1.6 MPa (16 bar).

The concept is now available in three new series:

- SFEX SERIES - Suction
- RFEX SERIES - Return
- LFEX SERIES - Delivery, which is equipped with differential indicator (electrical or visual)

Available in 4 sizes: 060, 080, 110, and 160, the new generation of filters is completely interchangeable with the previous MPS 050/070/100/150 series of the Spin-on range.

The new cast aluminium head and nylon design reduces weight by 10 per cent compared to the Spin-on range.

Less waste reduces both your carbon footprint and protects the environment.
Replacement is fast and easy, just disassemble the bowl with a 32mm fixed wrench , take out the FEX filter element and replace.



Improved connection system (between the head and the filter element and between the head and the bowl) reduces leakage so the dirt to the output circuit is reduced.



LFEX Series
New smaller differential indicator - electrical or visual.



High flow rate thanks to the head geometry: the oil enters in the filter element in a spiral flow and spreads more effectively inside the filter element for greater longevity.

RFEX GENERAL INFORMATION

Description

Return filter

Maximum working pressure up to 1.6 MPa (16 bar)
Flow rate up to 260 l/min

RFEX is a range of return filters for protection of the reservoir against the system contamination.
They can be mounted in line or directly fixed to the tank cover to limit aeration or foam generation into the reservoir.

Available features:
- Female threaded connections up to 1 1/4" and SAE connections up to 1 5/8", for a maximum flow rate of 260 l/min
- Fine filtration rating, to get a good cleanliness level into the reservoir
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical, axial and radial pressure gauges
- MYclean interface connection for the filter element, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

Common applications:
- Light Industrial equipment
- Mobile application

Technical data

Filter housing materials
- Head: Aluminium
- Bypass valve: Nylon - Steel
- Bowl: Nylon

Bypass valve
Opening pressure 175 kPa (1.75 bar) ±10%

Δp element type
- Microfibre filter elements - series N: 8 bar
- Fluid flow through the filter element from OUT to IN

Seals
Standard NBR series A

Temperature
From -25 °C to +110 °C

Note
RFEX filters are provided for vertical mounting




Weights [kg] and volumes [dm³]

Filter series	Weights [kg]	Volumes [dm³]
RFEX 060	0.50	0.60
RFEX 080	0.95	0.80
RFEX 110	1.20	1.60
RFEX 160	1.70	2.00


Hydraulic symbols


Filter series	Style S	Style B
RFEX 060	•	•
RFEX 080	•	•
RFEX 110	•	•
RFEX 160	•	•

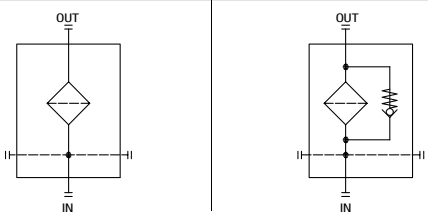


Pressure drop


Filter housings
Δp pressure drop

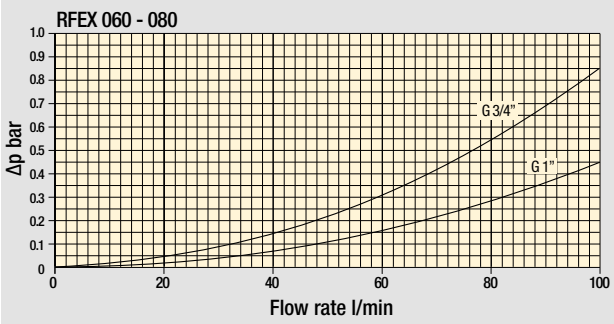

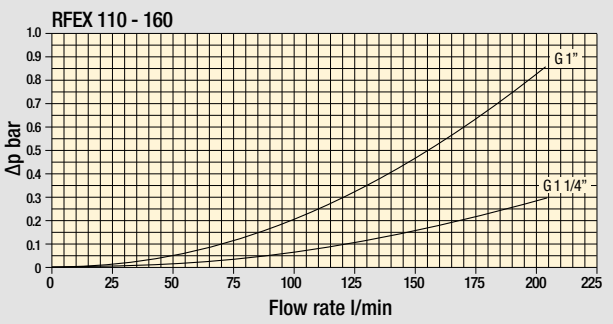

Bypass valve
pressure drop

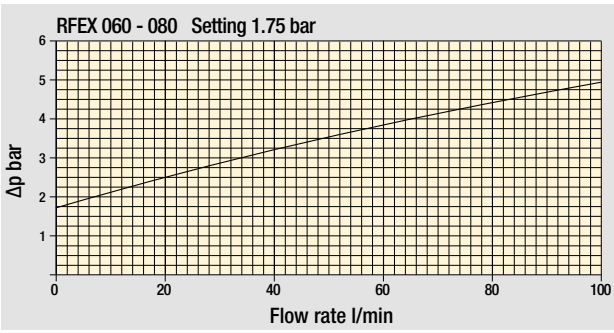

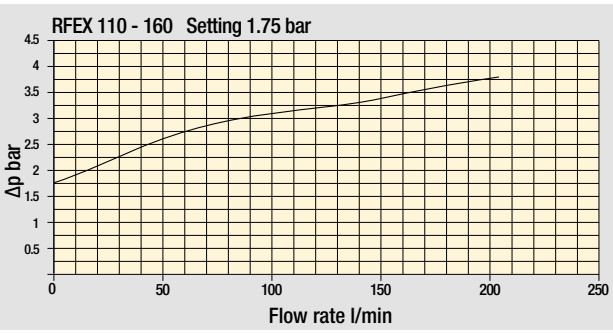

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968.
Δp varies proportionally with density.

Flow rates [l/min]

Filter element design - N Series

Filter series	A10	A16	A25	M60	M90	P10	P25
RFEX 060	52	53	55	71	72	54	59
RFEX 080	59	59	62	73	74	65	68

Connections of filter under test G 3/4".

Filter series	A10	A16	A25	M60	M90	P10	P25
RFEX 060	60	61	64	87	89	62	77
RFEX 080	69	70	75	91	92	79	93

Connections of filter under test G 1".

Filter series	A10	A16	A25	M60	M90	P10	P25
RFEX 110	141	153	172	250	252	186	196
RFEX 160	166	168	191	255	256	207	215

Connections of filter under test G 1 1/4".

Maximum flow rate for a complete return filter with a pressure drop Δp = 0.5 bar.
The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.
For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.
Please, contact our Sales Department for further additional information.

Designation & Ordering code

COMPLETE FILTER

Configuration example : RFEX060 | B | A | A | 6 | A10 | N | P01

Series and size
- **RFEX060**
- **RFEX080**

Bypass valve
- **S** Without bypass
- **B** 1.75 bar

Seals and treatments
- **A** NBR

Connections
- **A** G 3/4”
- **B** G 1”
- **C** 3/4” NPT
- **D** 1” NPT
- **E** SAE 12 - 1 1/16” - 12 UN
- **F** SAE 16 - 1 5/16” - 12 UN

Connection for clogging indicator
- **6** With plugged connections

Filtration rating (filter media)
- **A10** Inorganic microfiber 10 µm
- **A16** Inorganic microfiber 16 µm
- **A25** Inorganic microfiber 25 µm
- **M60** Wire mesh 60 µm
- **M90** Wire mesh 90 µm
- **P10** Resin impregnated paper 10 µm
- **P25** Resin impregnated paper 25 µm

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

FILTER ELEMENT

Configuration example: FEX060 | A10 | A | N | P01

Element series and size
- **FEX060**
- **FEX080**

Filtration rating (filter media)
- **A10** Inorganic microfiber 10 µm
- **A16** Inorganic microfiber 16 µm
- **A25** Inorganic microfiber 25 µm
- **M60** Wire mesh 60 µm
- **M90** Wire mesh 90 µm
- **P10** Resin impregnated paper 10 µm
- **P25** Resin impregnated paper 25 µm

Seals and treatments
- **A** NBR

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

ACCESSORIES

Clogging indicators


		page
BEA	Electrical pressure indicator	24
BEM	Electrical pressure indicator	24
BLA	Electrical / visual pressure indicator	24-25

		page
BVA	Axial pressure gauge	25
BVR	Radial pressure gauge	25
BVP	Visual pressure indicator with automatic reset	26
BVQ	Visual pressure indicator with manual reset	26

Dimensions

Filter size	H [mm]
060	202
080	265

Connections	T	R
A	G 1/8"	M6
B	G 1/8"	M6
C	1/8" NPT	1/4" UNC
D	1/8" NPT	1/4" UNC
E	1/8" NPT	1/4" UNC
F	1/8" NPT	1/4" UNC

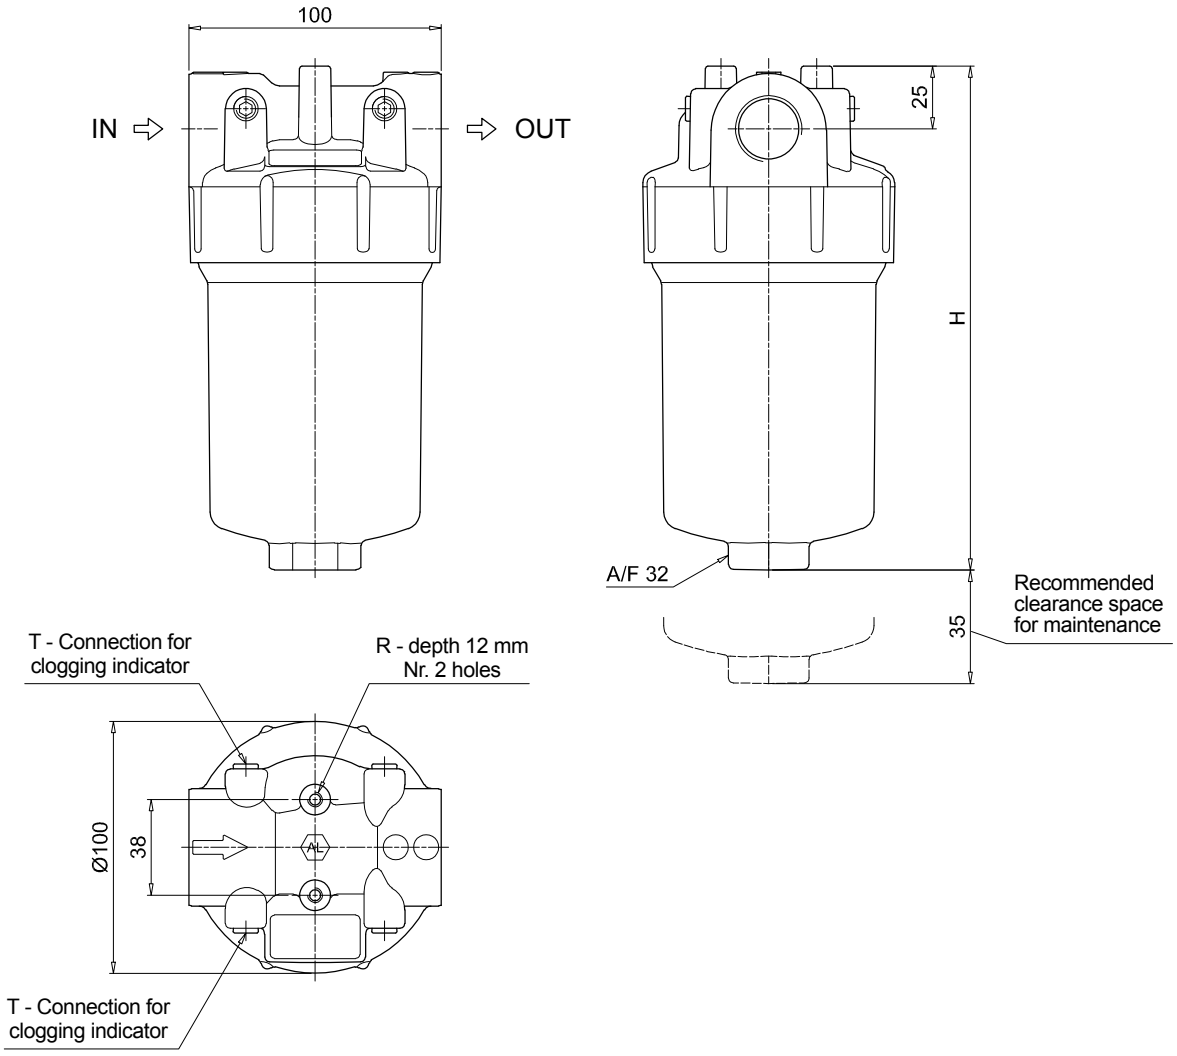

Designation & Ordering code

COMPLETE FILTER

Configuration example : RFEX110 | B | A | A | 6 | A10 | N | P01

Series and size
- **RFEX110**
- **RFEX160**

Bypass valve
- **S** Without bypass
- **B** 1.75 bar

Seals and treatments
- **A** NBR

Connections
- **A** G 1”
- **B** G 1 1/4”
- **C** 1” NPT
- **D** 1 1/4” NPT
- **E** SAE 16 - 1 5/16” - 12 UN
- **F** SAE 20 - 1 5/8” - 12 UN

Connection for clogging indicator
- **6** With plugged connections

Filtration rating (filter media)

A10	Inorganic microfiber	10 µm	**P10**	Resin impregnated paper	10 µm
A16	Inorganic microfiber	16 µm	**P25**	Resin impregnated paper	25 µm
A25	Inorganic microfiber	25 µm			
M60	Wire mesh	60 µm			
M90	Wire mesh	90 µm			

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

FILTER ELEMENT

Configuration example: FEX110 | A10 | A | N | P01

Element series and size
- **FEX110**
- **FEX160**

Filtration rating (filter media)

A10	Inorganic microfiber	10 µm	**P10**	Resin impregnated paper	10 µm
A16	Inorganic microfiber	16 µm	**P25**	Resin impregnated paper	25 µm
A25	Inorganic microfiber	25 µm			
M60	Wire mesh	60 µm			
M90	Wire mesh	90 µm			

Seals and treatments
- **A** NBR

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

ACCESSORIES

Clogging indicators


		page
BEA	Electrical pressure indicator	24
BEM	Electrical pressure indicator	24
BLA	Electrical / visual pressure indicator	24-25


		page
BVA	Axial pressure gauge	25
BVR	Radial pressure gauge	25
BVP	Visual pressure indicator with automatic reset	26
BVQ	Visual pressure indicator with manual reset	26

Dimensions

Filter size	H [mm]
110	266
160	315

Connections	T	R
A	G 1/8"	M8
B	G 1/8"	M8
C	1/8" NPT	5/16" UNC
D	1/8" NPT	5/16" UNC
E	1/8" NPT	5/16" UNC
F	1/8" NPT	5/16" UNC

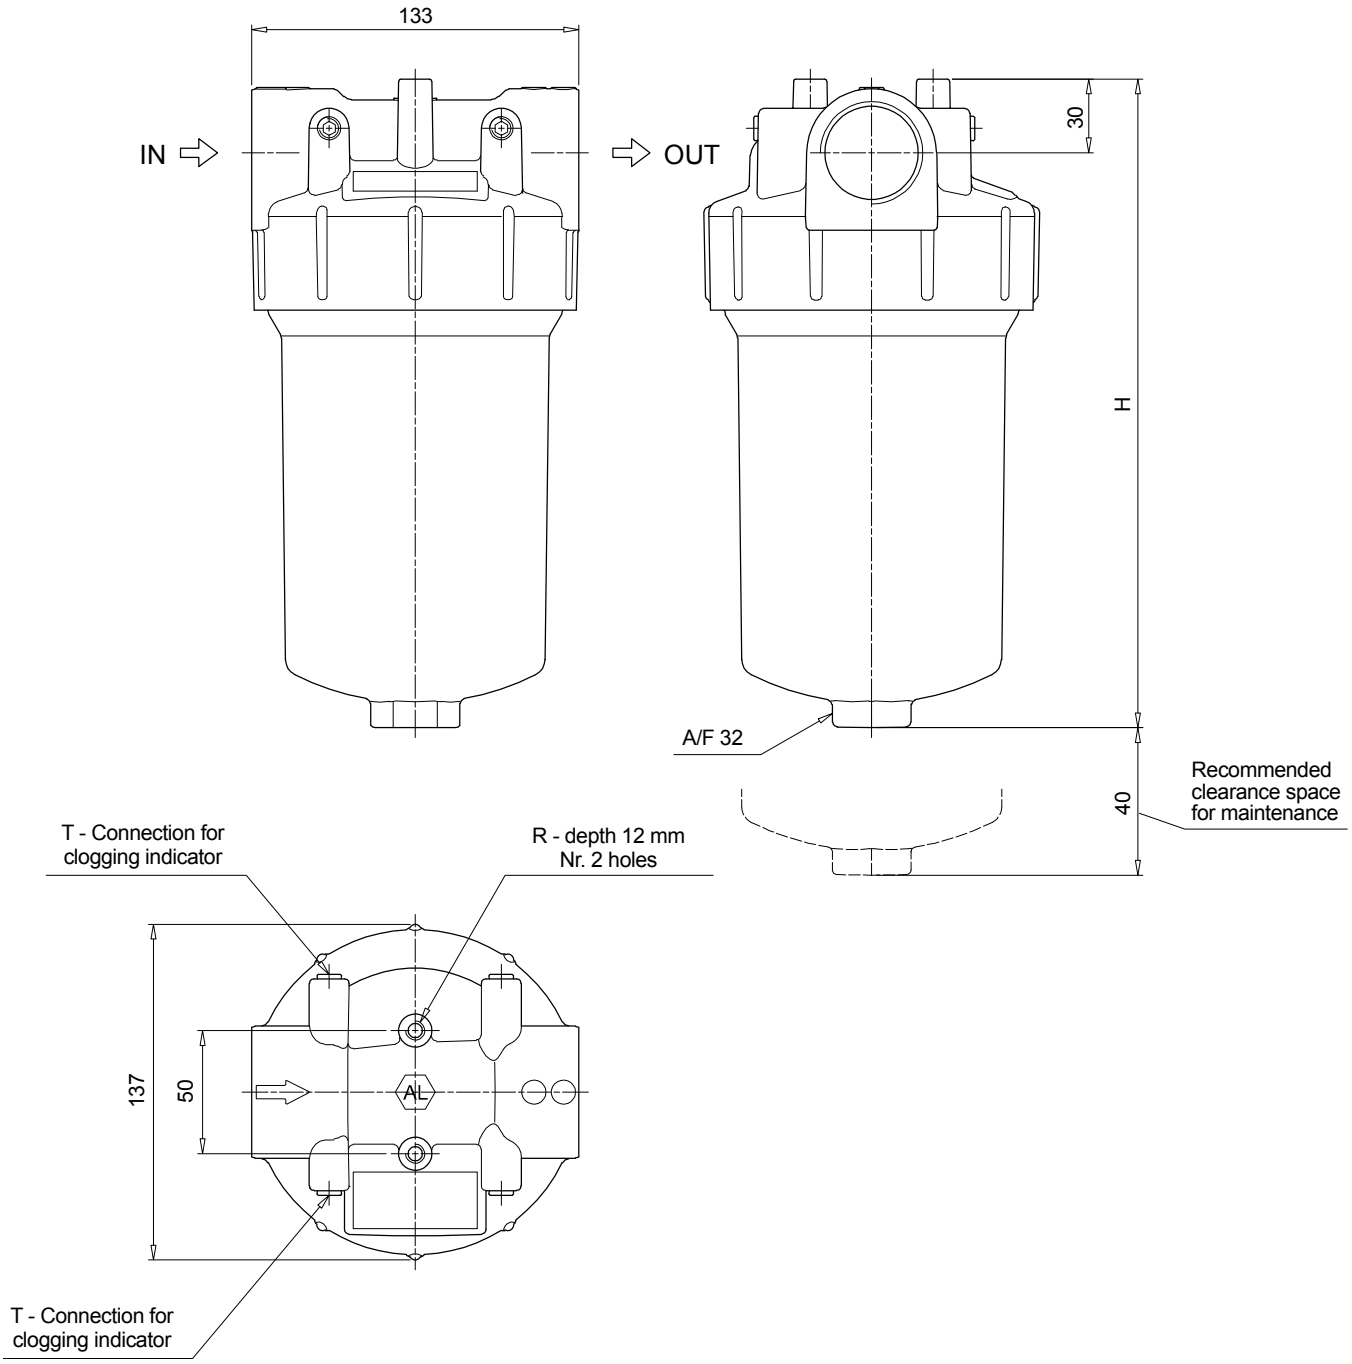

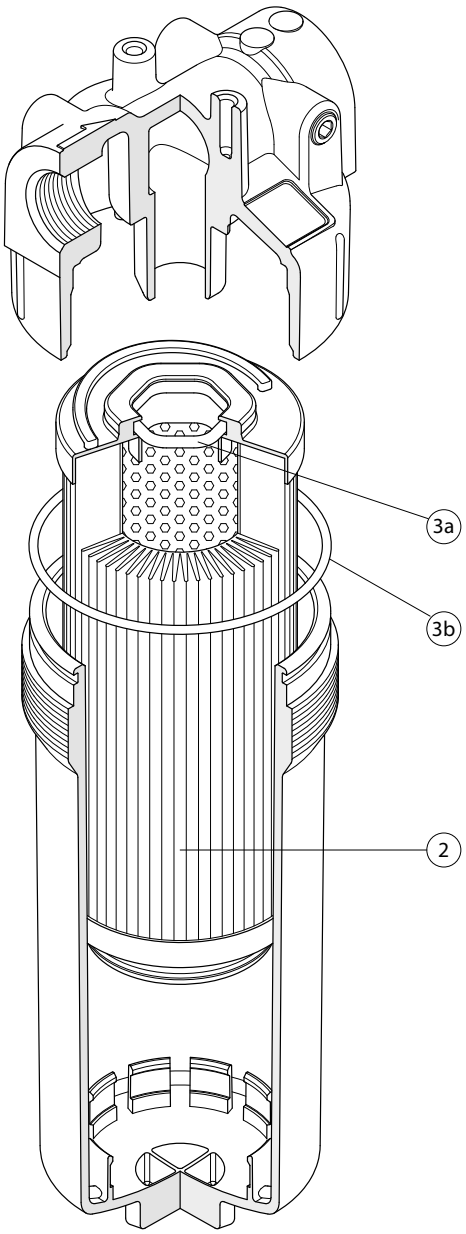

Item:	Q.ty: 1 pc. (2)	Q.ty: 1 pc. (3) (3a ÷ 3b)
Filter series	**Filter element**	**Seal Kit code number NBR**
RFEX 060-080	See order table	02050771
RFEX 110-160		02050772