


High/low pressure plate with port CETOP 5.
A-B side 3/4"G
HP (AP) 3/8"G, LP (BP) 3/4"G, rear.
T rear 3/4"G

TECHNICAL SPECIFICATIONS	
Nominal flow:	120 l/min.
Max pressure:	350 bar
Oil viscosity:	2,8-380 cSt
Oil temperature:	-10° +80° (°C)
Oil type:	mineral HL-HLP DIN 51524
Filtering:	19/15 ISO 4466 (25micron)
Gaskets:	Polyurethane and NBR
Body material:	GG 25
Weight :	10 Kg

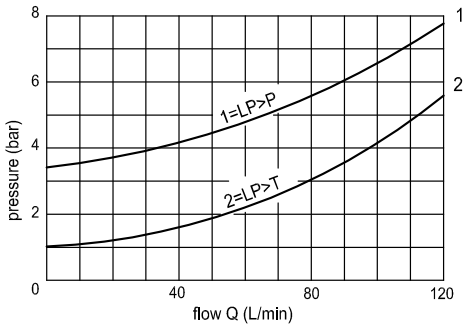

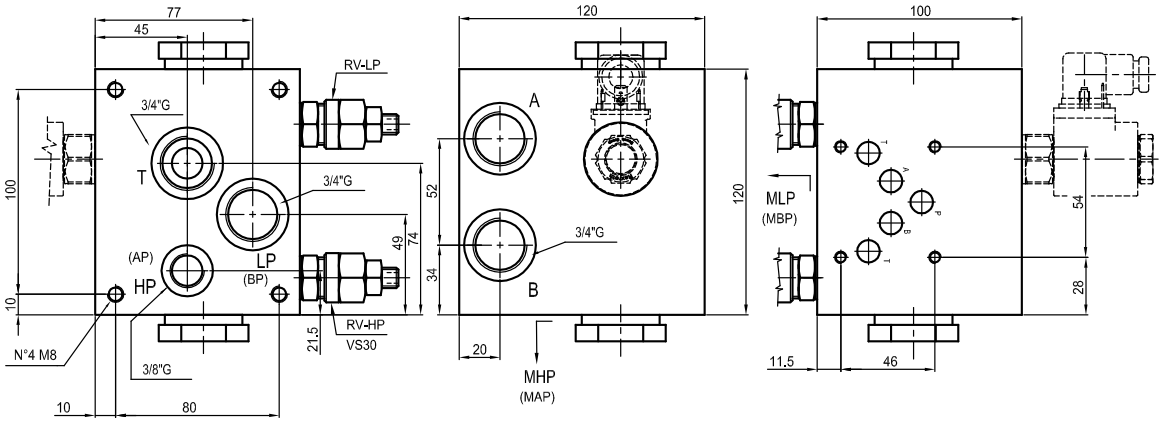

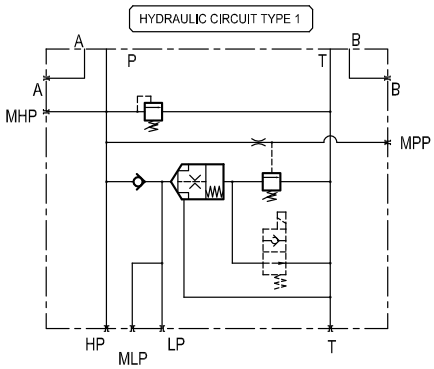

Ordering code: ET | 2 | 1 | 5 | / | * | *

- Low pressure setting (adjust by screw)
  - 0 F = 5-50 bar
  - 1 F = 30-100 bar
- High pressure setting (adjust by screw)
  - 2 F = 50-210 bar
  - 3 F = 100-350 bar
- CETOP 5
- Version excluding low pressure = 1
- Version port CETOP = 2
- Eurofluid = High/low pressure plate

REMARKS: 1) All plates have pre-arrangement for electric venting or replacement plug (see on page 94)
2) See on page 91 for technical specifications of VS30 valve