

Dimensions

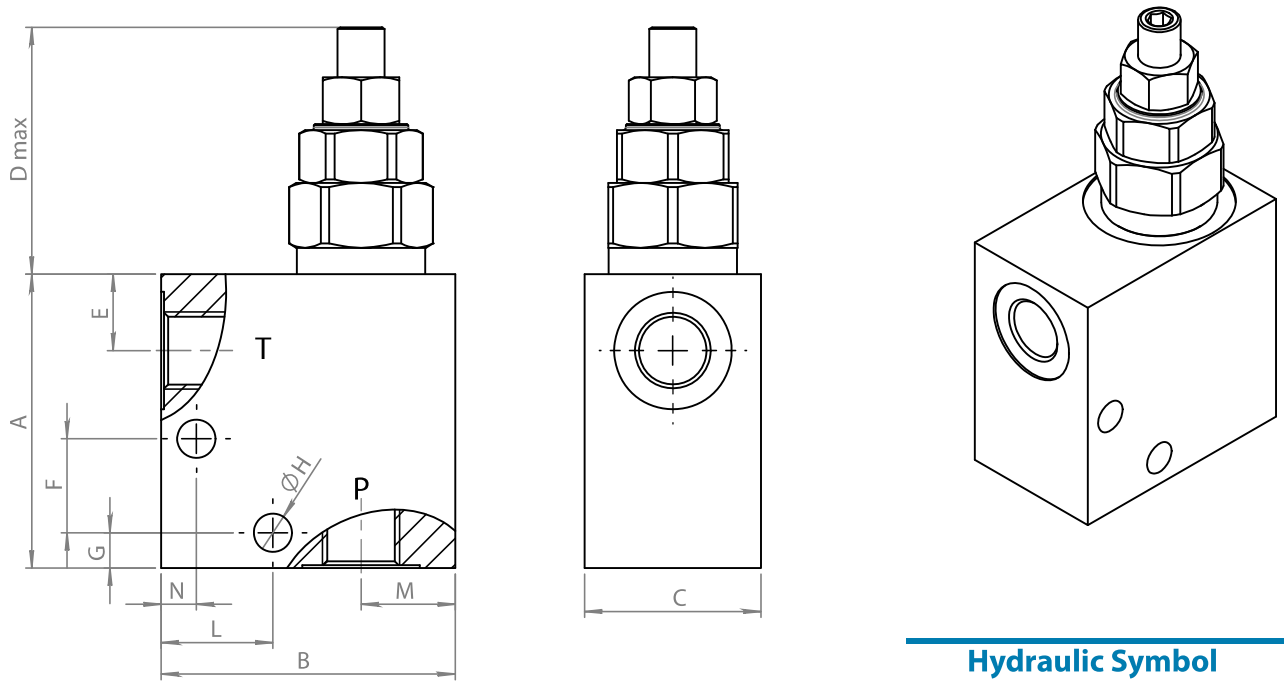


Size	A	B	C	D	E	F	G	H	L	M	N	P-T BSP	Weight kg
01	50	50	30	40	13	16	6	6,5	19	16	6	1/4	0,53
02	50	50	30	40	13	16	6	6,5	19	16	6	3/8	0,51

Hydraulic Symbol



Curves

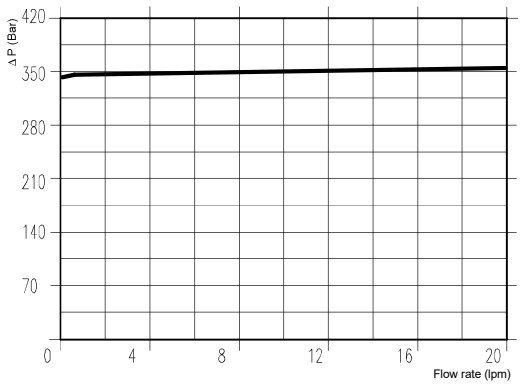

Features

Rated Flow	20 lpm
Max Pressure	350 bar

Materials: Zinc plated steel cartridge, hardened steel inner parts. Aluminium manifold.

Ordering Code

PRL 20	- -	- -	-

Port Size BSP

01	1/4
02	3/8

Spring (bar)

10	5-100
30	50-350

Adjustments

A	Socket Screw

Ordering Code Example: **PRL200230A** - 3/8 BSP - 50-350 bar setting range, Socket screw adjustment.