
IN-LINE MOUNTING BASE PLATE FOR MODULAR BLOCKS




Dimensions in mm (inches)


Main features


Max flow	40 l/min
Max pressure	350 bar
Weight	0,58 Kg (1,28 lb)
Fixing bolts	2 M8 or 4xM6 tie - rods steel class 8.8 or above

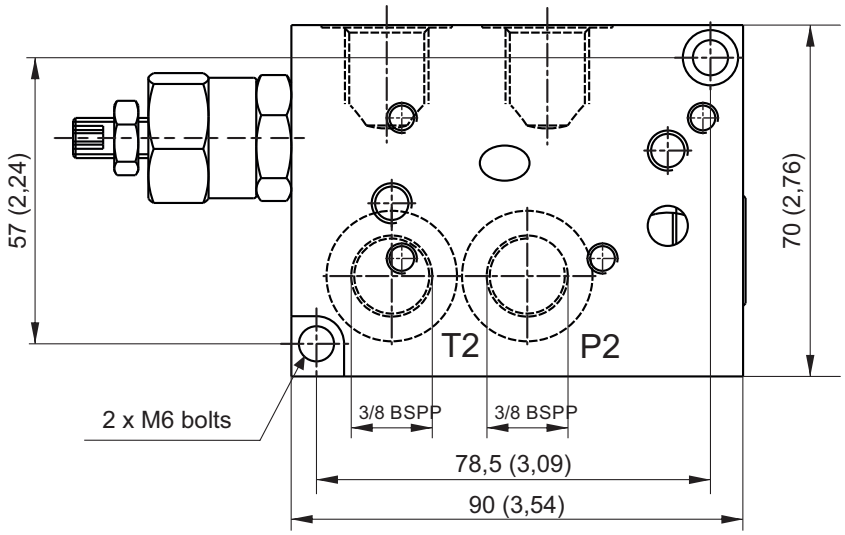

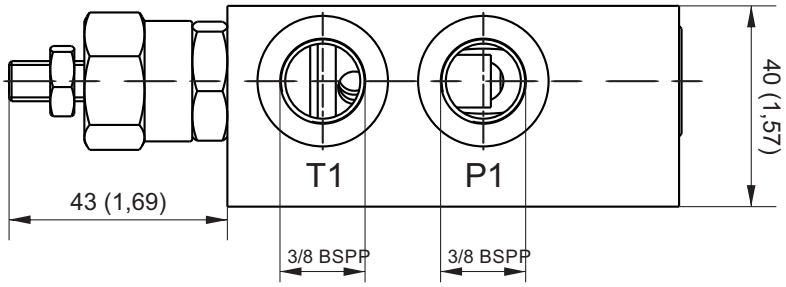

ASSEMBLY CODE - example

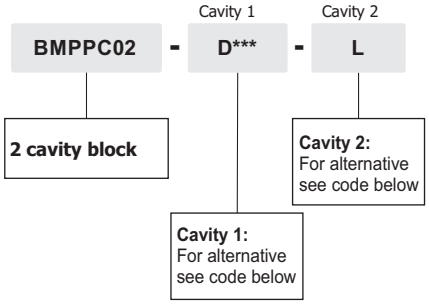



BMPPC02 allows you to mount off-line the entire system of Hydronit modular blocks and valves.
A typical application is to use it on a conventional powerpack, where the control block and the valve are separated from the engine driven pump.
P1 and T1 ports are closed by 3/8" BSP plugs in standard configuration.
You can use these ports dismounting the plugs and using the same to close P2 and T2 ports.
See cavity 1 VMDC35 table in section G.
See cavity 2 components and plugs tables in section D.

