
CYLINDRICAL STEEL TANKS A SERIES



Recommended tightening
torque for Filler Cap: 5 Nm

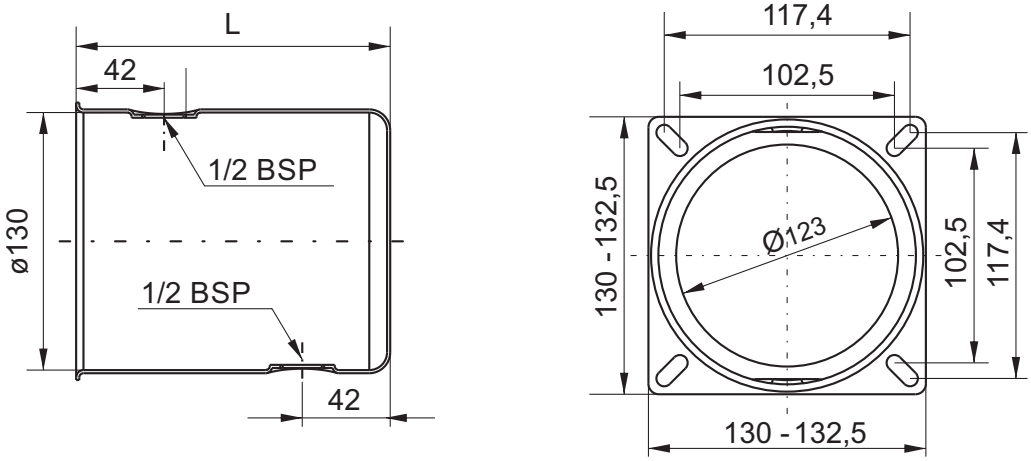

Description	Spare part code	Assembly code	L (mm)	Weight	Actual filling volume lt (gal)	
					Horizontal	Vertical
1,5 l cylindrical horizontal / vertical mounting	**E60303001**	**1,5A / 1,5AV**	150	0,78 Kg	1,5 (0,40)	1,0 (0,26)
2,5 l cylindrical horizontal / vertical mounting	**E60303004**	**2,5A / 2,5AV**	235	1,04 Kg	2,5 (0,66)	2,0 (0,53)

All dimensions are in mm


Material	Fe P04-EN10130 steel sheet 1,5mm thickness, 2,5mm thickness flange
Fluid	Mineral based oil ISO/DIN 6743/4
Working temperature	-15 / +70°C


Notes: the piping kit, standard suction filter, filler/breather and drain plug are included when specifying the tank in PPC assembly code. When ordering spare parts, only the drain plug and filler/breather are included.

CYLINDRICAL STEEL TANKS A & B SERIES



Recommended tightening torque for Filler Cap: 5 Nm

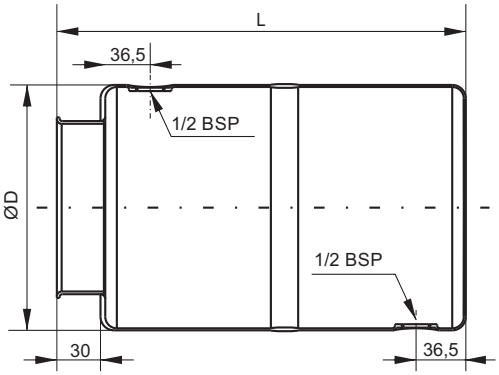

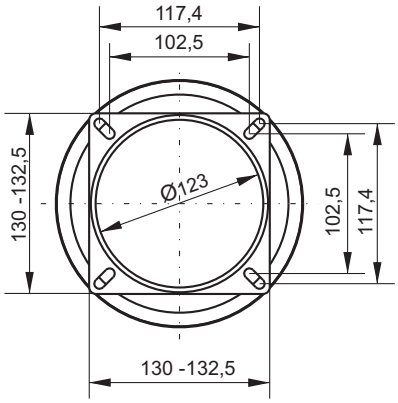

Description	Spare part code	Assembly code	L (mm)	ØD (mm)	Weight	Actual filling volume lt (gal)	
						Horiz.	Vert.
5 l cylindrical horizontal / vertical mounting	**E60303006**	**5B / 5BV**	300	180	1,82 Kg	6,3 (1,66)	5,1 (1,35)
10 l cylindrical horizontal / vertical mounting	**E60303011**	**10B / 10BV**	262	220	2,01 Kg	8,3 (2,19)	6,3 (1,66)
12 l cylindrical horizontal / vertical mounting	**E60303012**	**12B / 12BV**	380	220	2,47 Kg	12,5 (3,30)	10,9 (2,88)
5 l cylindrical horizontal / vertical mounting	**S60303006**	**5BRP / 5BVRP**	215	200	2,08 Kg	6,2 (1,64)	5,0 (1,32)

All dimensions are in mm

Material	Fe P04-EN10130 steel sheet 1,5mm thickness, 2,5mm thickness flange
Fluid	Mineral based oil ISO/DIN 6743/4
Working temperature	-15 / +70°C

Notes: the piping kit, standard suction filter, filler/breather and drain plug are included when specifying the tank in PPC assembly code. When ordering spare parts, only the drain plug and filler/breather are included.