
INTERPUMP HyWASHER PLUS 6K

APPLICATIONS :

TCB2E42 TCN2E42

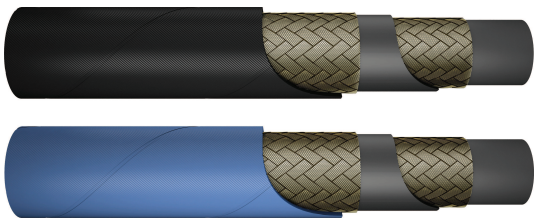

APPLICABLE SPECIFICATIONS

ISO 7751

Compact, light and flexible hose line with Safety factor exceeding ISO 7751. Product designed for pressure wash, water and steam cleaning and sanitization.

Inner tube: Synthetic rubber, extruded whole without joints, of uniform thickness.
Reinforcement: 2 high-load steel wire braids.
Coverage: Anti-abrasive syntetic rubber, resistant to oils and animal fat, water, water base fluids and atmospheric conditions.
Recommended fluids: Water, water-soap based, glicol-water based, steam and sanitizers.
working temperature: +155°C water, water base fluid. +163°C steam.

Product number	ID		OD	Max WP Hot Water	SAFETY	Max WP Steam	Min BP	Min BR	Weight	Ferrule	Color
	in	mm		bar	FACTOR	bar	bar	mm	Kg/m		Coverage
TCB2E42-04M005	1/4"	6.4	13.3	420	4	28	1680	65	0.29	001C-04	B
TCB2E42-05M005	5/16"	8.0	14.8	420	3	28	1260	75	0.33	001C-05	B
TCB2E42-06M005	3/8"	9.5	17.1	420	3	28	1260	85	0.42	001C-06	B
TCB2E42-08M005	1/2"	12.7	20.4	420	3	28	1260	100	0.52	001C-08	B
TCN2E42-04M005	1/4"	6.4	13.3	420	4	28	1680	65	0.29	001C-04	N
TCN2E42-05M005	5/16"	8.0	14.8	420	3	28	1260	75	0.33	001C-05	N
TCN2E42-06M005	3/8"	9.5	17.1	420	3	28	1260	85	0.42	001C-06	N
TCN2E42-08M005	1/2"	12.7	20.4	420	3	28	1260	100	0.52	001C-08	N

-Standard package: length multiple of 5m. with minimum length of 10m. - For steam use, pinprick the cover and use a anti kink system at the ends. - Cover with custom colours available on request.