Low & Medium Pressure filters

LFEX series

Maximum working pressure up to 1.6 MPa (16 bar) - Flow rate up to 300 l/min



ELIXIR®

Lighter, easier to use, and kinder to the environment - MP Filtri's new ELIXIR low pressure concept filters have been specially designed for in-line connections and to handle working pressures up to 1.6 MPa (16 bar).

The concept is now available in three new series:

- SFEX SERIES - Suction
- RFEX SERIES - Return
- LFEX SERIES - Delivery, which is equipped with differential indicator (electrical or visual)

Available in 4 sizes: 060, 080, 110, and 160, the new generation of filters is completely interchangeable with the previous MPS 050/070/100/150 series of the Spin-on range.

The new cast aluminium head and nylon design reduces weight by 10 per cent compared to the Spin-on range.

Less waste reduces both your carbon footprint and protects the environment.
Replacement is fast and easy, just disassemble the bowl with a 32mm fixed wrench , take out the FEX filter element and replace.



Improved connection system (between the head and the filter element and between the head and the bowl) reduces leakage so the dirt to the output circuit is reduced.



LFEX Series
New smaller differential indicator - electrical or visual.



High flow rate thanks to the head geometry: the oil enters in the filter element in a spiral flow and spreads more effectively inside the filter element for greater longevity.

LFEX GENERAL INFORMATION

Description

Low & Medium Pressure filters

Maximum working pressure up to 1.6 MPa (16 bar)
Flow rate up to 300 l/min

LFEX is a range of low pressure filter for protection of sensitive components in low pressure hydraulic systems.
They are also suitable for the off-line filtration of small reservoirs.
They are directly connected to the lines of the system through the hydraulic fittings.

Available features:

- Female threaded connections up to 1 1/4" and SAE connections up to 1 5/8", for a maximum flow rate of 300 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid
- Bypass valve, to relieve excessive pressure drop across the filter media
- NEW Visual and electrical differential clogging indicators, capable to hold the overall dimension
- MYclean interface connection for the filter element, to protect the product against non-original spare parts
- External protective wrap, to optimize the flow through the element and to save the element efficiency against non-proper handling

Common applications:

Delivery lines, in any low pressure industrial equipment or mobile machines

Technical data

Filter housing materials

- Head: Aluminium
- Bypass valve: Nylon - Steel
- Bowl: Nylon

Bypass valve

Opening pressure 350 kPa (3.5 bar) ±10%

Δp element type

- Microfibre filter elements - series N: 8 bar
- Fluid flow through the filter element from OUT to IN

Seals

Standard NBR series A

Temperature

From -25 °C to +110 °C

Note

LFEX filters are provided for vertical mounting





Weights [kg] and volumes [dm³]

Filter series	Weights [kg]	Volumes [dm³]
LFEX 060	0.50	0.60
LFEX 080	0.95	0.80
LFEX 110	1.20	1.60
LFEX 160	1.70	2.00

Hydraulic symbols


Filter series	Style S	Style B
LFEX 060	•	•
LFEX 080	•	•
LFEX 110	•	•
LFEX 160	•	•







Pressure drop


Filter housings
Δp pressure drop

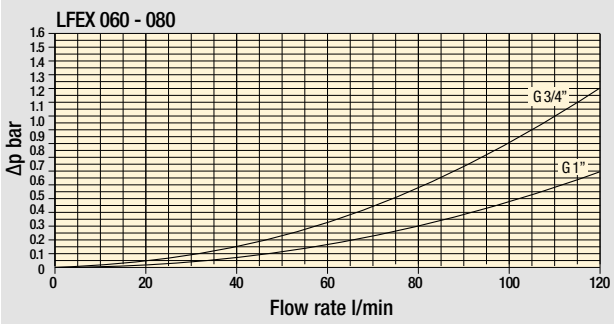

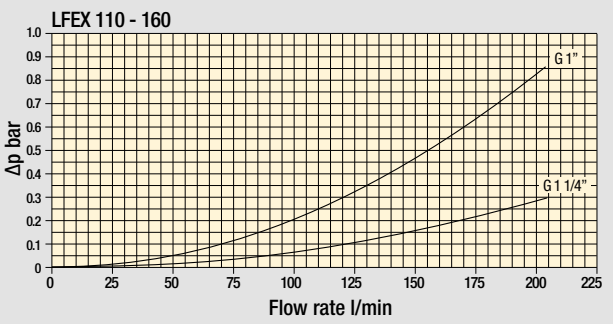

Bypass valve
pressure drop

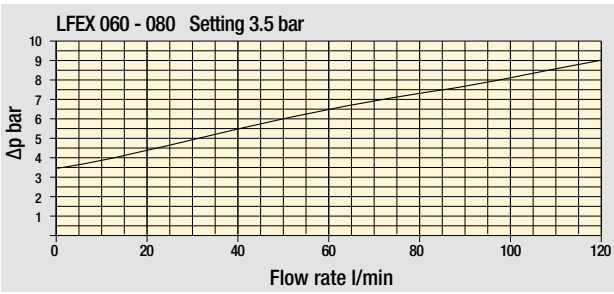

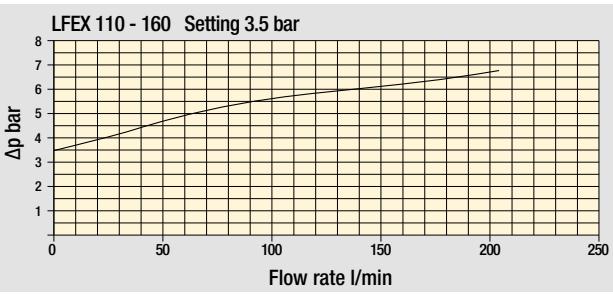

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968.
Δp varies proportionally with density.

Flow rates [l/min]

Filter element design - N Series

Filter series	A03	A06	A10	A16	A25	M25	M60	M90	P10	P25
LFEX 060	45	47	65	66	68	84	84	86	67	73
LFEX 080	58	59	73	72	76	86	87	88	79	82

Connections of filter under test G 3/4".

Filter series	A03	A06	A10	A16	A25	M25	M60	M90	P10	P25
LFEX 060	49	51	75	77	80	104	105	107	74	95
LFEX 080	67	67	86	87	92	107	108	110	96	112

Connections of filter under test G 1".

Filter series	A03	A06	A10	A16	A25	M25	M60	M90	P10	P25
LFEX 110	107	115	182	195	216	295	298	300	232	242
LFEX 160	146	150	210	212	237	300	303	304	254	262

Connections of filter under test G 1 1/4".

Maximum flow rate for a complete delivery filter with a pressure drop Δp = 0.7 bar.
The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.
For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.
Please, contact our Sales Department for further additional information.

Designation & Ordering code

COMPLETE FILTER

Configuration example : LFEX060 | B | A | A | 6 | A10 | N | P01

Series and size
- **LFEX060**
- **LFEX080**

Bypass valve
- **S** Without bypass
- **B** 3.5 bar

Seals and treatments
- **A** NBR

Connections
- **A** G 3/4”
- **B** G 1”
- **C** 3/4” NPT
- **D** 1” NPT
- **E** SAE 12 - 1 1/16” - 12 UN
- **F** SAE 16 - 1 5/16” - 12 UN

Connection for clogging indicator
- **1** Without
- **6** With plugged connections

Filtration rating (filter media)

A03	Inorganic microfiber	3 µm	**M25**	Wire mesh	25 µm
A06	Inorganic microfiber	6 µm	**M60**	Wire mesh	60 µm
A10	Inorganic microfiber	10 µm	**M90**	Wire mesh	90 µm
A16	Inorganic microfiber	16 µm	**P10**	Resin impregnated paper	10 µm
A25	Inorganic microfiber	25 µm	**P25**	Resin impregnated paper	25 µm

WA025 Water absorber inorganic microfiber 25 µm

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

FILTER ELEMENT

Configuration example: FEX060 | A10 | A | N | P01

Element series and size
- **FEX060**
- **FEX080**

Filtration rating (filter media)

A03	Inorganic microfiber	3 µm	**M25**	Wire mesh	25 µm
A06	Inorganic microfiber	6 µm	**M60**	Wire mesh	60 µm
A10	Inorganic microfiber	10 µm	**M90**	Wire mesh	90 µm
A16	Inorganic microfiber	16 µm	**P10**	Resin impregnated paper	10 µm
A25	Inorganic microfiber	25 µm	**P25**	Resin impregnated paper	25 µm

WA025 Water absorber inorganic microfiber 25 µm

Seals and treatments
- **A** NBR

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized


ACCESSORIES

Differential indicators		page
DES	Electrical differential indicator	36
DVS	Visual differential indicator	37

Dimensions

Filter size	H [mm]
060	202
080	265

Connections	T	R
A	G 1/8"	M6
B	G 1/8"	M6
C	1/8" NPT	1/4" UNC
D	1/8" NPT	1/4" UNC
E	1/8" NPT	1/4" UNC
F	1/8" NPT	1/4" UNC

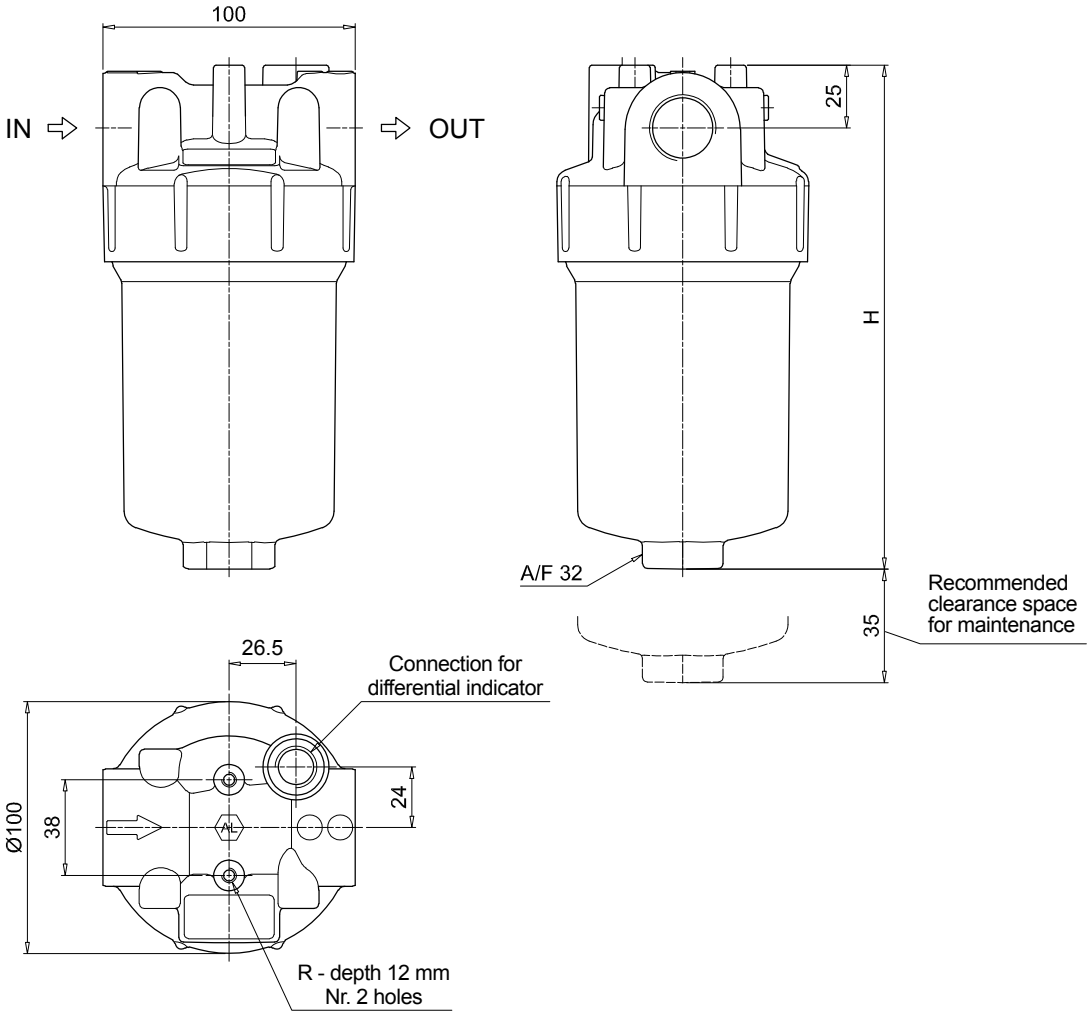

Designation & Ordering code

COMPLETE FILTER

Configuration example : LFEX110 | B | A | A | 6 | A10 | N | P01

Series and size
- **LFEX110**
- **LFEX160**

Bypass valve
- **S** Without bypass
- **B** 3.5 bar

Seals and treatments
- **A** NBR

Connections
- **A** G 1”
- **B** G 1 1/4”
- **C** 1” NPT
- **D** 1 1/4” NPT
- **E** SAE 16 - 1 5/16” - 12 UN
- **F** SAE 20 - 1 5/8” - 12 UN

Connection for clogging indicator
- **1** Without
- **6** With plugged connections

Filtration rating (filter media)

A03	Inorganic microfiber	3 µm	**M25**	Wire mesh	25 µm
A06	Inorganic microfiber	6 µm	**M60**	Wire mesh	60 µm
A10	Inorganic microfiber	10 µm	**M90**	Wire mesh	90 µm
A16	Inorganic microfiber	16 µm	**P10**	Resin impregnated paper	10 µm
A25	Inorganic microfiber	25 µm	**P25**	Resin impregnated paper	25 µm

WA025 Water absorber inorganic microfiber 25 µm

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

FILTER ELEMENT

Configuration example: FEX110 | A10 | A | N | P01

Element series and size
- **FEX110**
- **FEX160**

Filtration rating (filter media)

A03	Inorganic microfiber	3 µm	**M25**	Wire mesh	25 µm
A06	Inorganic microfiber	6 µm	**M60**	Wire mesh	60 µm
A10	Inorganic microfiber	10 µm	**M90**	Wire mesh	90 µm
A16	Inorganic microfiber	16 µm	**P10**	Resin impregnated paper	10 µm
A25	Inorganic microfiber	25 µm	**P25**	Resin impregnated paper	25 µm

WA025 Water absorber inorganic microfiber 25 µm

Seals and treatments
- **A** NBR

Element Δp
- **N** 8 bar

Execution
- **P01** MP Filtri standard
- **Pxx** Customized

ACCESSORIES


Differential indicators page

- **DES** Electrical differential indicator 36
- **DVS** Visual differential indicator 37


Dimensions

Filter size	H [mm]
110	266
160	315

Connections	T	R
A	G 1/8"	M8
B	G 1/8"	M8
C	1/8" NPT	5/16" UNC
D	1/8" NPT	5/16" UNC
E	1/8" NPT	5/16" UNC
F	1/8" NPT	5/16" UNC

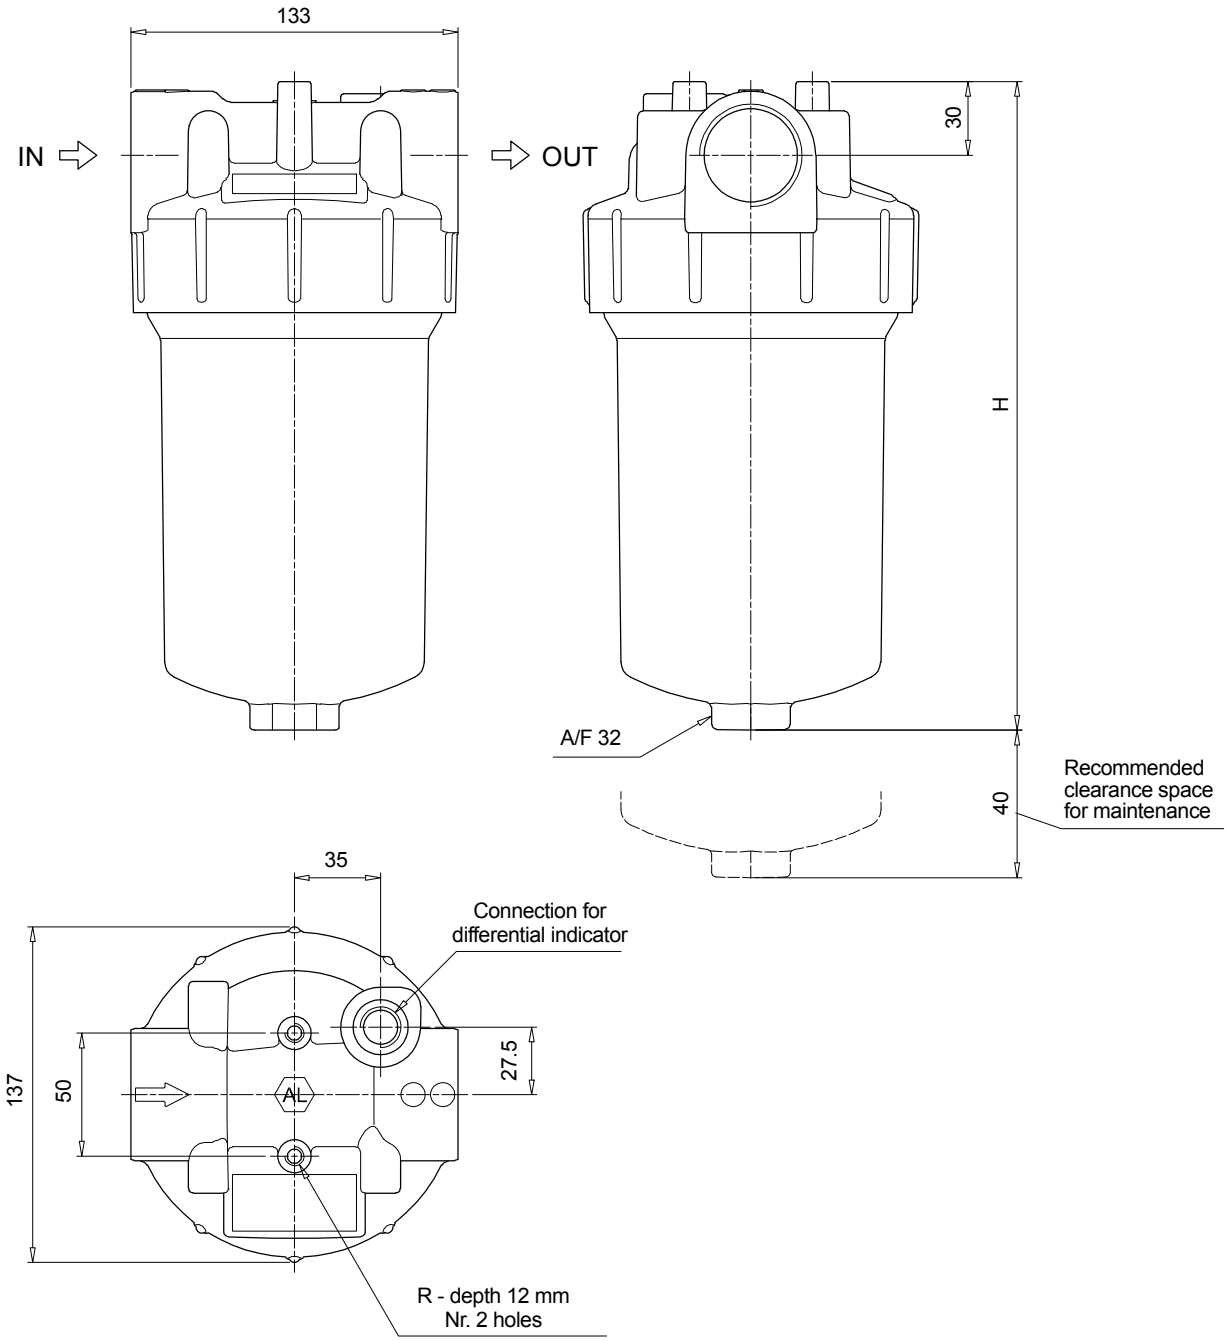

Order number for spare parts

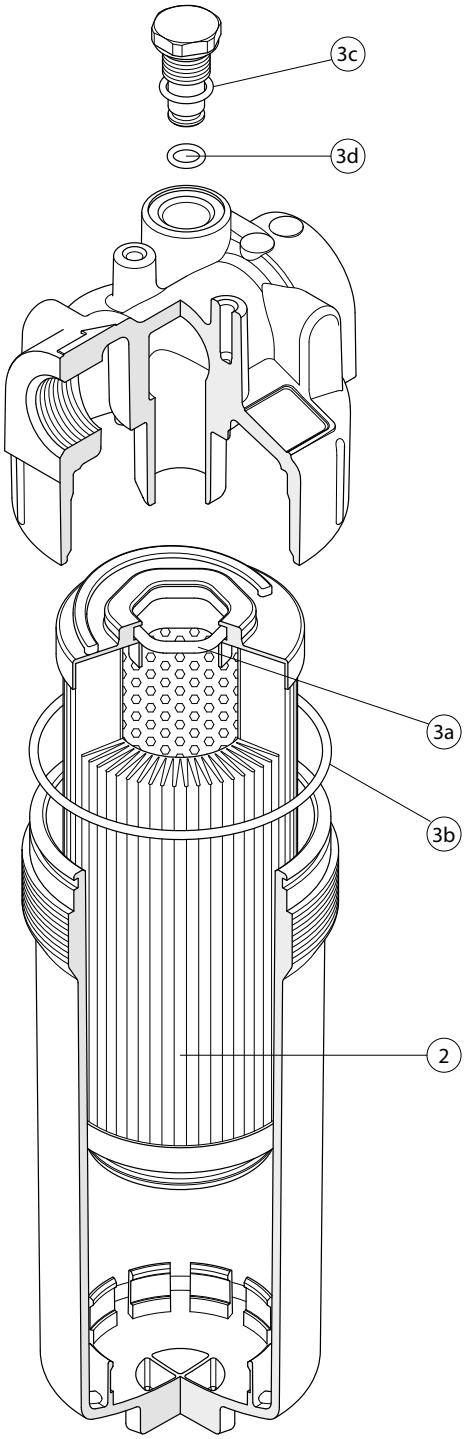

Item:	Q.ty: 1 pc. (2)	Q.ty: 1 pc. (3) (3a ÷ 3d)	Q.ty: 1 pc. (4)
Filter series	**Filter element**	**Seal Kit code number NBR**	**Indicator connection plug NBR**
LFEX 060-080	See order table	02050771	T3H
LFEX 110-160		02050772	