

## ROUND STEEL TANKS F & H SERIES



Recommended tightening torque for 3/8" BSPP: 10 Nm




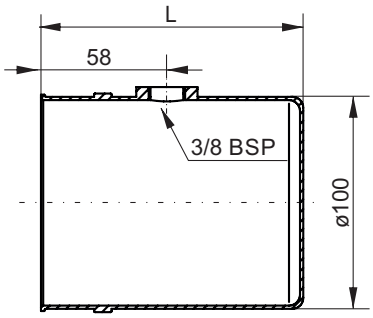


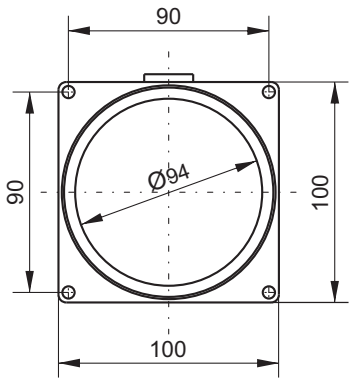

| Description | Spare part code | Assembly code | L (mm) | Weight | Actual filling volume (lt) |
|---|---|---|---|---|---|
| | | | | | Vertical |
| 0,7 l cylindrical vertical mounting | **E50403001** | **0,7FV** | 120 | 0,56 Kg | 0,52 |
| 1,2 l cylindrical vertical mounting | **E50403002** | **1,2FV** | 186 | 0,77 Kg | 0,9 |

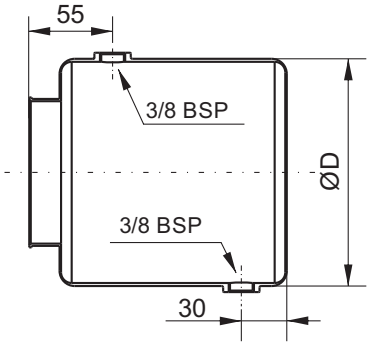

Recommended tightening torque for 3/8" BSPP: 10 Nm

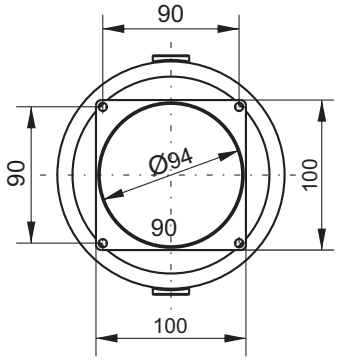


| Description | Spare part code | Assembly code | L (mm) | ØD (mm) | Weight | Actual filling volume (lt) | |
|---|---|---|---|---|---|---|---|
| | | | | | | Horizon. | Vert. |
| 1,7 l cylindrical horizontal / vertical mounting | **E50404004** | **1,7H / 1,7HV** | 170 | 120 | 0,64 Kg | 1,5 | 1,2 |
| 2,4 l cylindrical horizontal / vertical mounting | **E50404006** | **2,4H / 2,4HV** | 170 | 150 | 0,8 Kg | 2,4 | 1,8 |


| | |
|---|---|
| **Material** | Fe P04-EN10130 steel sheet 1,5 mm thickness |
| **Fluid** | Mineral based oil ISO/DIN 6743/4 |
| **Working temperature** | -15 / +70°C |


Note: the piping kit, standard suction filter, filler/breather and discharge plug are included when specifying the tank in PPM assembly code
When ordering spare parts, only the discharge plug and filler/breather are included

## CYLINDRICAL STEEL TANKS A SERIES



Recommended tightening
torque for Filler Cap: 5 Nm

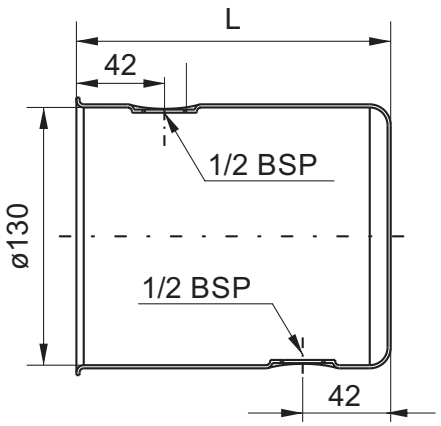

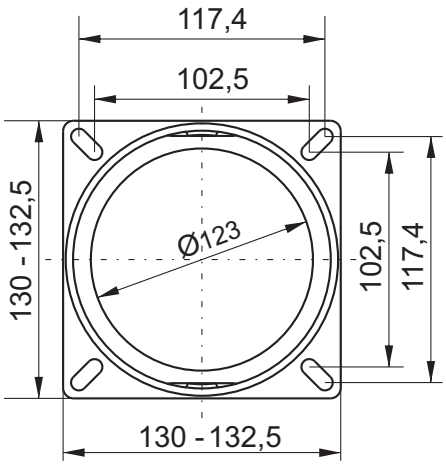
| Description | Spare part code | Assembly code | L (mm) | Weight | Actual filling volume lt (gal) | |
|---|---|---|---|---|---|---|
| | | | | | Horizontal | Vertical |
| 1,5 l cylindrical horizontal / vertical mounting | **E60303001** | **1,5A / 1,5AV** | 150 | 0,78 Kg | 1,5 (0,40) | 1,0 (0,26) |
| 2,5 l cylindrical horizontal / vertical mounting | **E60303004** | **2,5A / 2,5AV** | 235 | 1,04 Kg | 2,5 (0,66) | 2,0 (0,53) |

All dimensions are in mm


| | |
|---|---|
| **Material** | Fe P04-EN10130 steel sheet 1,5mm thickness, 2,5mm thickness flange |
| **Fluid** | Mineral based oil ISO/DIN 6743/4 |
| **Working temperature** | -15 / +70°C |


Notes: the piping kit, standard suction filter, filler/breather and drain plug are included when specifying the tank in PPC assembly code. When ordering spare parts, only the drain plug and filler/breather are included.

## CYLINDRICAL STEEL TANKS A & B SERIES



Recommended tightening torque for Filler Cap: 5 Nm

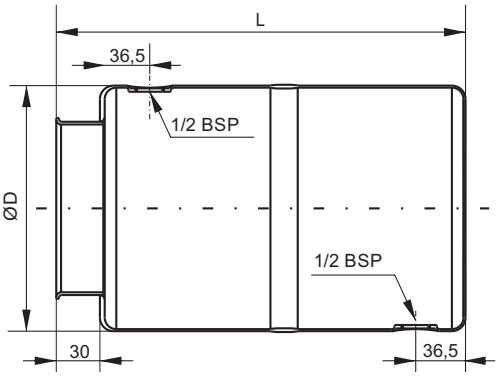

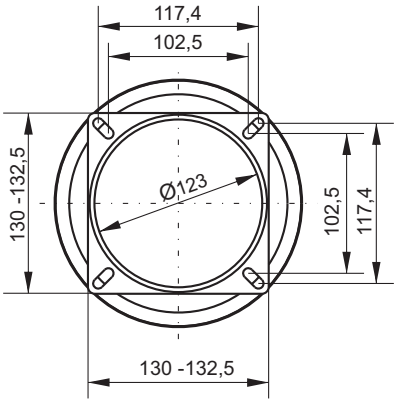
| Description | Spare part code | Assembly code | L (mm) | ØD (mm) | Weight | Actual filling volume lt (gal) | |
|---|---|---|---|---|---|---|---|
| | | | | | | Horiz. | Vert. |
| 5 l cylindrical horizontal / vertical mounting | **E60303006** | **5B / 5BV** | 300 | 180 | 1,82 Kg | 6,3 (1,66) | 5,1 (1,35) |
| 10 l cylindrical horizontal / vertical mounting | **E60303011** | **10B / 10BV** | 262 | 220 | 2,01 Kg | 8,3 (2,19) | 6,3 (1,66) |
| 12 l cylindrical horizontal / vertical mounting | **E60303012** | **12B / 12BV** | 380 | 220 | 2,47 Kg | 12,5 (3,30) | 10,9 (2,88) |
| 5 l cylindrical horizontal / vertical mounting | **S60303006** | **5BRP / 5BVRP** | 215 | 200 | 2,08 Kg | 6,2 (1,64) | 5,0 (1,32) |

All dimensions are in mm

| | |
|---|---|
| **Material** | Fe P04-EN10130 steel sheet 1,5mm thickness, 2,5mm thickness flange |
| **Fluid** | Mineral based oil ISO/DIN 6743/4 |
| **Working temperature** | -15 / +70°C |

Notes: the piping kit, standard suction filter, filler/breather and drain plug are included when specifying the tank in PPC assembly code. When ordering spare parts, only the drain plug and filler/breather are included.