
SPACER ELEMENTS




Dimensions in mm (inches)

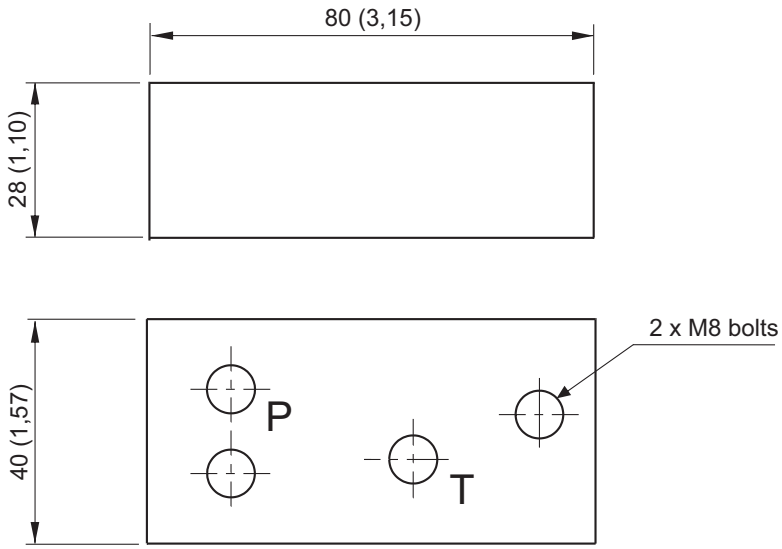


Main features


Max pressure	350 bar
Weight	0,23 Kg (0,5lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above

Mounting example

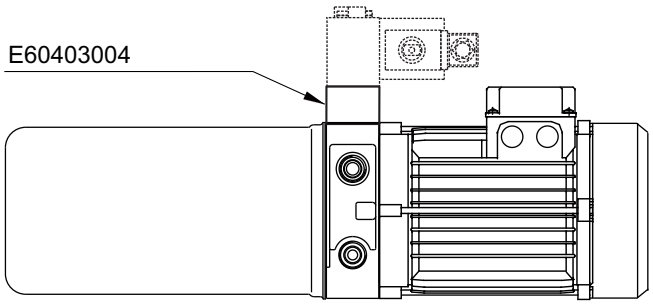



Spare part code
E60403004




Spare part code
E60403004CV

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.
Suitable with AC motor frames bigger than 71 and DC motors bigger than dia. 125, to avoid interference between the valves and the motor.

PPM SPACER ELEMENT 23MM




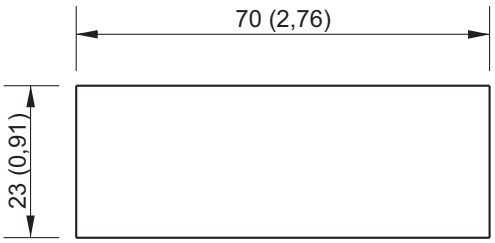


Dimensions in mm (inches)

Main features


Max pressure	350 bar
Weight	0,14 Kg (0,3lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above

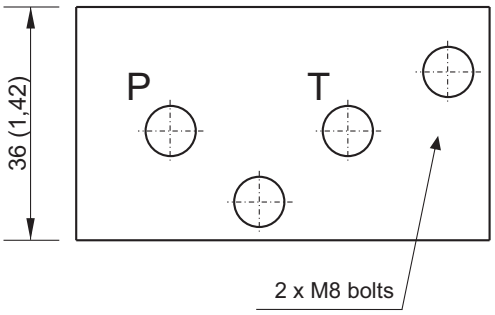



Spare part code
M60403004

Mounting example

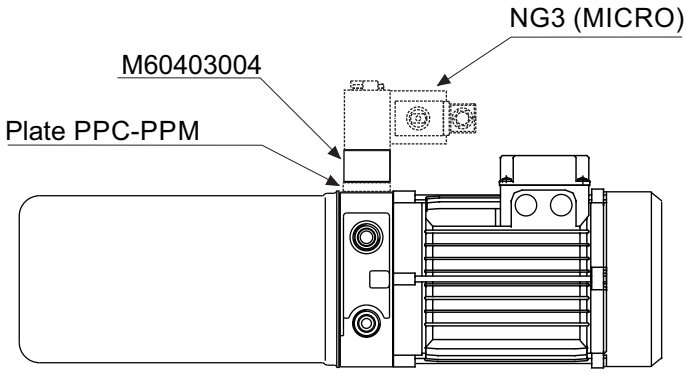

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.
To add NG3 MICRO external manifolds to a PPC assembly code, just add the converter PPC to PPM first, then the additional manifolds spare part codes at the end of the PPC code. eg: PPC-0,8 12DC-MB-J-K0,6-V200-G-RETURN KIT-1,5L+**EMASH00001+M60403004+M60403010.**