


High/low pressure plate with port CETOP 5
HP (AP) 3/8"G, LP (BP) 1/2"G, T 3/4"G, rear.
A-B side 3/4"G
MHP - MLP side 1/4"G

TECHNICAL SPECIFICATIONS	
Nominal flow:	50 l/min.
Max pressure:	300 bar
Oil viscosity:	2,8-380 cSt
Oil temperarature:	-10° +80° (°C)
Oil type:	mineral HL-HLP DIN 51524
Filtering:	19/15 ISO 4466 (25micron)
Gaskets	NBR
Body material:	GG25
Weight:	6.5 Kg

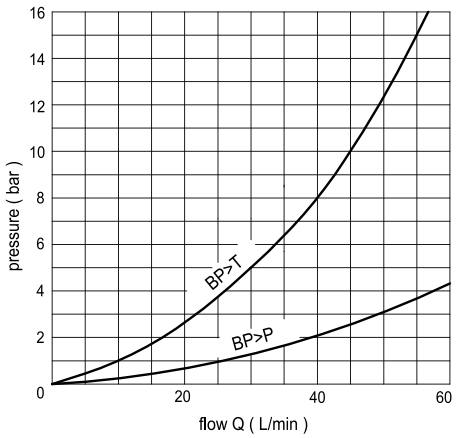

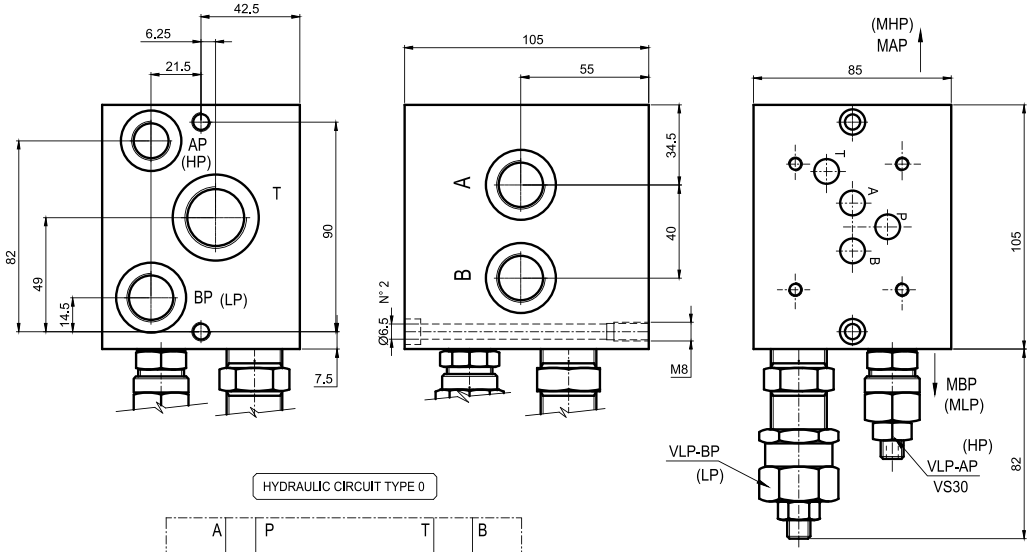

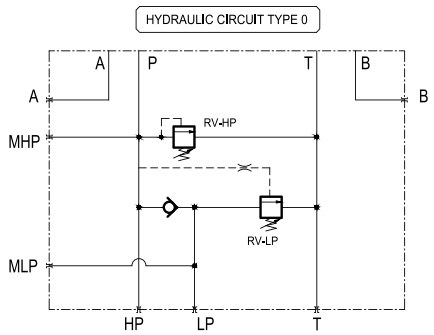

Ordering code: ET 2 0 5 / * *

Eurofluid = T
High/low pressure plate

Version port CETOP 2

Version standard = 0

CETOP 5

Low pressure setting (adjust by screw)
1 F = 5-50 bar
2 F = 30-100 bar

High pressure setting (adjust by screw)
2 F = 50-210 bar
3 F = 100-300 bar

REMARKS: See on page 91 for technical specifications of VS30 valve