
Hand pumps — PMD 6-12-25-45 dna-byA-L-s — Tech sheet

DETAILS

with 4/3 flow divider open centre
with release lever
with pressure relief valve
double acting hand pump for a double acting cylinder for fixing to tank

SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection Ø 27
White zinc plated external parts
Standard colour black
Oil tank mounting kit included

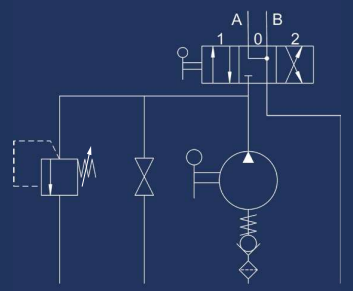



Pressure relief valve standard setting: **100 bar**



On Demand ATEX Certificates
II2G Ex h IIB TX Gb
II2D Ex h IIIB TX Db

EFFORT DIAGRAM

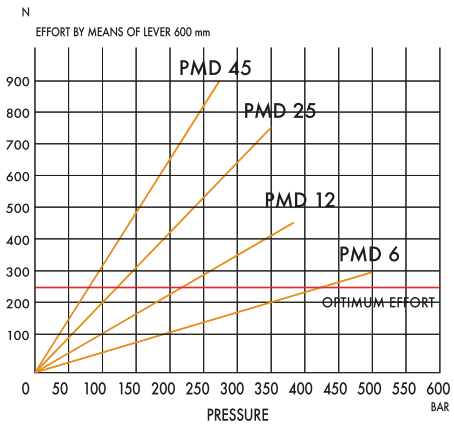

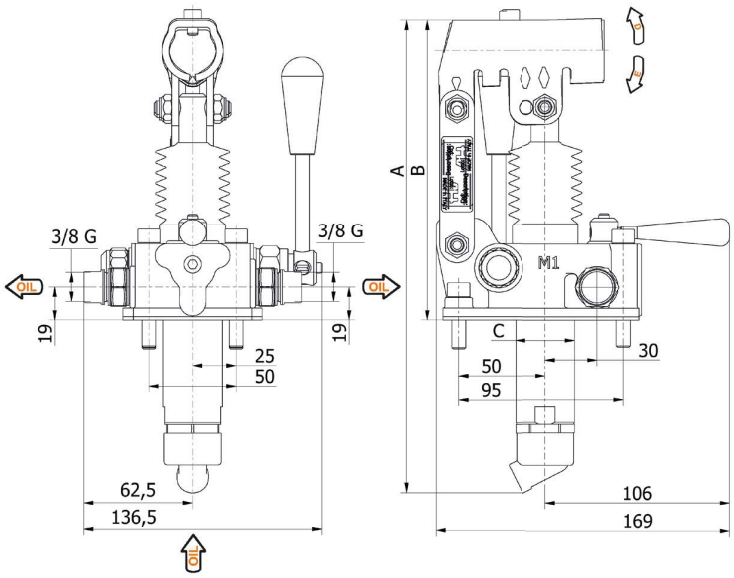

DISPLACEMENT cm³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm³	PRESSURE BAR OPTIMAL	PRESSURE BAR MAX	MASS KG	CODE
6	253	166	34	26	31	6,970	420	500	3,400	6054.0053
12	253	166	34	26	31	12,095	220	380	3,400	6055.0053
25	273	172	34	30	30	25,280	120	350	3,450	6056.0053
45	283	172	40	45	33	44,532	80	280	3,500	6057.0053

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Tel. + 39 051 670.50.11 – Fax +39 051 670.53.74
P.IVA/C.F. 02390201206 – R.E.A. 435998 – Codice Univoco: 7HE8RN5
E-mail: info@hvhydraulic.com - Web: www.hvhydraulic.com