


RF40P



MAIN FEATURES

- Flow 0 to 40 l/min
- Inlet and Outlet (Tank or Exceeding) 1/2" / SAE 10. Priority Outlet 3/8" BSP / SAE 8



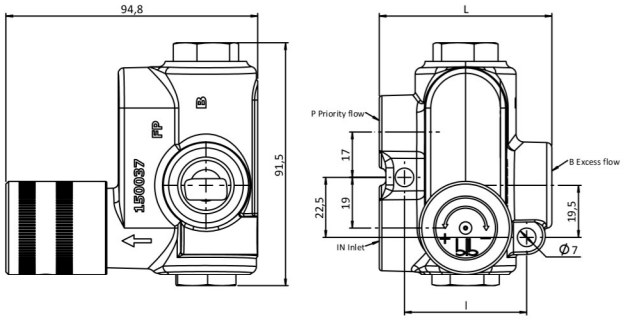

TECHNICAL SPECIFICATIONS

MAX FLOW RATE	(l/min) (gpm)	50 13,21
ADJUSTMENT OF THE PRIORITY FLOW	(l/min) (gpm)	from 0 to 40
MAX PRESSURE ON PORTS	bar psi	250 3600

STANDARD THREADS


	IN	P	B
G (BSP)	1/2"	3/8"	1/2"
F (UNF-SAE)	7/8"-14	3/4"-16	7/8"-14

DIMENSIONS AND WEIGHT

NUMBER OF SECTIONS	L		l		Weight	
	mm	inch	mm	inch	kg	lb
RF40P	65	2,52	46	1,81	1,24	2,70


VARIATION OF PRIORITY FLOW (P) DEPENDING ON ΔP BETWEEN PRIORITY FLOW (P) AND OVERFLOW (B)

B - EXCESS FLOW PRESSURE > P - PRIORITY FLOW PRESSURE

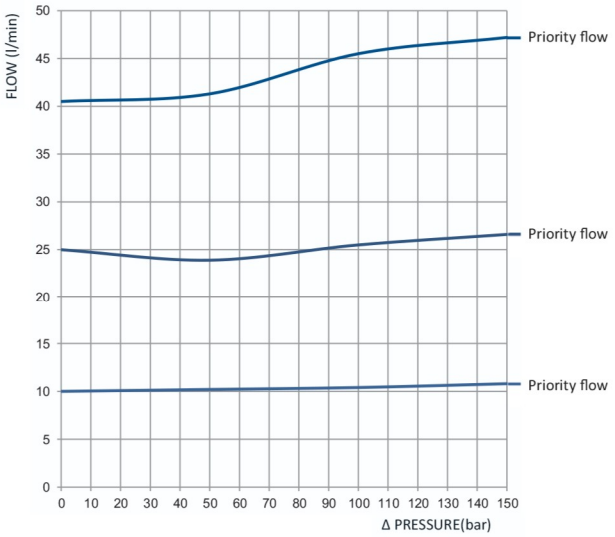

P - PROPRITY FLOW REGOLATION

B - EXCESS FLOW PRESSURE > P - PRIORITY FLOW PRESSURE

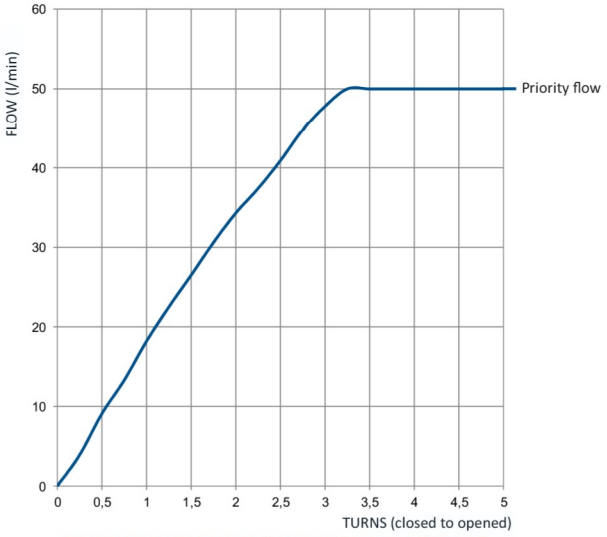

VARIATION OF PRIORITY FLOW IN RELATION TO Δ PRESSURE BETWEEN P AND B CIRCUITS

P - PRIORITY FLOW PRESSURE > B - EXCESS FLOW PRESSURE

