MULTI-COMPONENTS

IEC electric motor range from size 132 up to size 355



Technical data

Modular Bell-Housing Components - IEC electric motor range from size 132 up to size 355


Materials
- Base module: Pressure die-cast aluminium alloy
- Pump flange: Aluminium alloy
- Intermediate adapter: Aluminium alloy.
- Screw kit: Steel
- Gaskets: Special paper (Guarnital)

Compatibility with fluids
Modular bell-housing components compatible for use with:
- Mineral oils types HH-HL-HM-HR-HV, to ISO 6743/4 standard
- Water based emulsions types HFAE-HFAS, to ISO 6743/4 standard
- Water glycol type HFC, to ISO 6743/4 standard: ask for anodized version

Special Applications
Any applications not covered by the normal indications contained in this catalogue must be evaluated and approved by MP Filtri Technical and Sales Department

Temperature
From -30 °C to +80 °C

Note
For temperatures outside this range, contact MP Filtri Technical and Sales Department

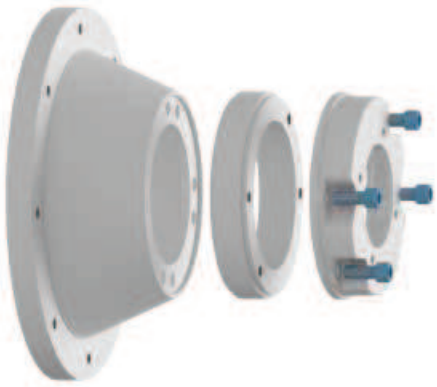

BMC

Bell-Housing size	Flange ISO 3019-2 50 B2-B4	63 B2-B4	80 B2-B4	100 B2-B4	125 B2-B4	160 B2-B4	200 B2-B4	IEC Motors size
BMC200	●	●	●	●				**IEC 80 Ø200 - Ø19x40**
BMC200	●	●	●	●				**IEC 90 Ø200 - Ø24x50**
BMC250	●	●	●	●	●			**IEC 100 Ø250 - Ø28x60**
BMC250	●	●	●	●	●			**IEC 112 Ø250 - Ø28x60**
BMC300			●	●	●	●		**IEC 132 Ø300 - Ø38x80**
BMC350			●	●	●	●		**IEC 160 Ø350 - Ø42x110**
BMC350			●	●	●	●	●	**IEC 180 Ø350 - Ø48x110**
BMC400			●	●	●	●	●	**IEC 200 Ø400 - Ø55x110**
BMC450			●	●	●	●	●	**IEC 225 Ø450 - Ø60x140**

Bell-Housing size	Flange SAE J 744 50-2 (A-A)	82-2 (A)	101-2 (B)	127-2 (C)	152-2 (D)	165-2 (E)	101-4 (B)	127-4 (D)	152-4 (D)	165-4 (E)	IEC Motors size
BMC200	●	●									**IEC 80 Ø200 - Ø19x40**
BMC200	●	●									**IEC 90 Ø200 - Ø24x50**
BMC250	●	●	●				●				**IEC 100 Ø250 - Ø28x60**
BMC250	●	●	●	●			●				**IEC 112 Ø250 - Ø28x60**
BMC300		●	●	●			●	●			**IEC 132 Ø300 - Ø38x80**
BMC350		●	●	●			●	●			**IEC 160 Ø350 - Ø42x110**
BMC350		●	●	●	●		●	●	●		**IEC 180 Ø350 - Ø48x110**
BMC400		●	●	●	●	●	●	●	●	●	**IEC 200 Ø400 - Ø55x110**
BMC450			●	●	●	●		●	●	●	**IEC 225 Ø450 - Ø60x140**

BMT

Bell-Housing size	Flange ISO 3019-2 50 B2-B4	63 B2-B4	80 B2-B4	100 B2-B4	125 B2-B4	160 B2-B4	200 B2-B4	IEC Motors size
BMT300			●	●	●	●		**IEC 132 Ø300 - Ø38x80**
BMT350			●	●	●	●		**IEC 160 Ø350 - Ø42x110**
BMT350			●	●	●	●	●	**IEC 180 Ø350 - Ø48x110**
BMT400			●	●	●	●	●	**IEC 200 Ø400 - Ø55x110**
BMT450			●	●	●	●	●	**IEC 225 Ø450 - Ø60x140**
BMT550					●	●	●	**IEC 250 Ø550 - Ø65x140**
BMT550					●	●	●	**IEC 280 Ø550 - Ø75x140**
BMT660					●	●	●	**IEC 315 Ø660 - Ø80x170**
BAD800					●	●	●	**IEC 355 Ø800 - Ø95x210**

Bell-Housing size	Flange SAE J 744 50-2 (A-A)	82-2 (A)	101-2 (B)	127-2 (C)	152-2 (D)	165-2 (E)	101-4 (B)	127-4 (D)	152-4 (D)	165-4 (E)	IEC Motors size
BMT300		●	●	●			●	●			**IEC 132 Ø300 - Ø38x80**
BMT350		●	●	●			●	●			**IEC 160 Ø350 - Ø42x110**
BMT350		●	●	●	●		●	●	●		**IEC 180 Ø350 - Ø48x110**
BMT400		●	●	●	●	●	●	●	●	●	**IEC 200 Ø400 - Ø55x110**
BMT450			●	●	●	●		●	●	●	**IEC 225 Ø450 - Ø60x140**
BMT550				●	●	●		●	●	●	**IEC 250 Ø550 - Ø65x140**
BMT550				●	●	●		●	●	●	**IEC 280 Ø550 - Ø75x140**
BMT660				●	●	●		●	●	●	**IEC 315 Ø660 - Ø80x170**
BAD800				●	●	●		●	●	●	**IEC 355 Ø800 - Ø95x210**

Designation & Ordering code

BMC

1 Motor base series and size

Configuration example: BMC200A1001 | DI

BMC200A1001	**BMC300A1551**	**BMC400A2016**
BMC200A1251	**BMC300A1555**	**BMC450A2507**
BMC250A1141	**BMC300A1705**	
BMC250A1361	**BMC350A1945**	
	BMC350A1946	

BMT300A0805	**BMT550A21567**
BMT350A1105	**BMT660A25067**
BMT400A1106	**BAD800A2707**
BMT450A1406	

Options

DI	Drain hole + inspection hole
AN	Black anodized finish
SA	Clearance holes at motor interface
Pxx	Customer specification

2 Intermediate adapter series and size

Configuration example: AD60465 | AN

AD60465
AD50385
AD60466
AD50386
AD50467
AD60467

Options

AN	Black anodized finish
Pxx	Customer specification

3 Pump flange series and size

Configuration example: FP5026 | 070 | AN

FR1023	**FP5026**	**FP6032**	**FP7052**
FR1025	**FP5032**	**FP6045**	**FP7066**
FR1033	**FP5035**	**FP6058**	**FP7069**
FR1035	**FP5045**	**FP6070**	**FP7086**
FR1040	**FP5056**	**FP6082**	**FP70111**
FR1079	**FP5063**	**FP6086**	
	FP5091	**FP60101**	
		FP60110	

Pump interface codes

070	See page 56

Options


FR	Holes rotated through 45° in relation to standard position
DP	Double set of hole
AN	Black anodized finish
Pxx	Customer specification

Options


Mounting kit code series and size

KVG1		
KVG5	See page 107	
KVG6		
KVG7		

Valid configuration for bell-housing up to Ø400

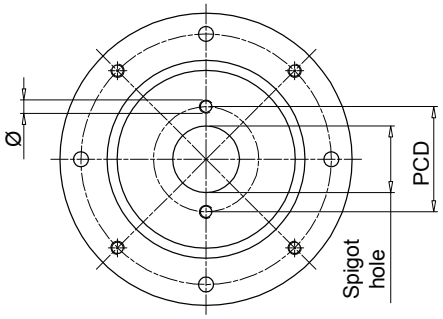


Bell-housing with nr. 2 holes at pump interface, aligned with through holes at motor interface.

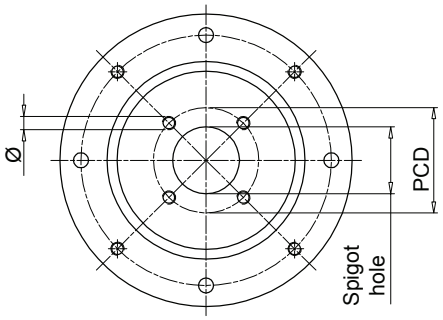


Bell-housing with nr. 4 holes at pump interface, aligned with thread holes at motor interface.

Valid configuration for bell-housing from Ø450 to Ø660

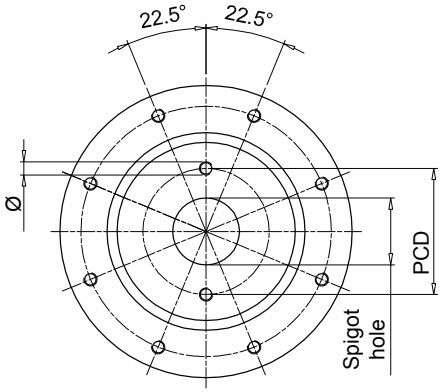

Bell-housing with nr. 2 holes at pump interface + 22.5° compared to through holes at motor interface.

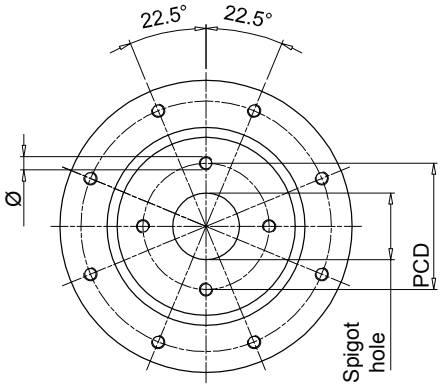

Bell-housing with nr. 4 holes at pump interface + 22.5° compared to thread holes at motor interface.

Spigot hole [mm]	PCD	Ø	Nr. holes	Code	Type
40	72.00	M8	2	**191**	-
45.2	88.90	M8	4	**096**	-
	71.80	M8	4	**120**	-
50	80.00	M8	2	**052**	ISO3019-2-50-B2
	93.00	M10	2	**053**	-
	60.00	M5	4	**280**	-
	63.00	Ø7	4	**057**	-
	93.00	M8	2	**287**	-
50.8	82.50	M8	2	**050**	SAE A-A 50-2
56	76.00	M6	4	**234**	-
57.15	106.40	Ø11	2	**212**	-
60	74.00	M10	4	**098**	-
	98.50	M6	4	**147**	-
	75.00	M6	4	**227**	-
62.7	157.20	M12	4	**231**	-
63	100.00	M8	2	**042**	ISO3019-2-63-B2
	125.00	M6	4	**043**	-
	85.00	M8	4	**044**	-
	80.00	M8	2	**051**	-
	80.00	Ø8.5	4	**058**	-
	100.00	M10	2	**062**	-
	82.00	M8	4	**168**	ISO3019-2-63-B4
	90.00	M8	4	**271**	-
65	90.00	M8	4	**073**	-
70	84.00	Ø7	4	**289**	-
71.8	88.90	M10	4	**047**	-
75	102.00	M10	4	**139**	-
80	100.00	M8	4	**024**	ISO3019-2-80-B4
	103.20	M8	2	**045**	ISO3019-2-80-B2
	100.00	Ø11	4	**059**	-
	100.00	M10	2	**061**	-
	110.00	M10	2	**063**	-
	140.00	M10	2	**064**	-
	115.00	M10	2	**065**	-
	100.00	M10	4	**067**	-
	106.40	M10	2	**083**	-
	130.00	M8	4	**087**	-
	100.00	Ø8.5	4	**093**	-
	113.00	M12	4	**104**	-
	95.00	M8	4	**169**	-
	103.00	M8	4	**242**	-
	110.00	M10	4	**272**	-
82.55	106.40	M10	2	**060**	SAE A 82-2
	105.00	M10	4	**097**	-
	106.40	M8	2	**254**	-
	146.00	M12	2	**260**	-
	110.00	M10	2	**284**	-
85	106.40	M10	2	**066**	-
90	112.00	M8	2	**134**	-
	105.00	M8	4	**156**	-
	118.00	Ø9	2	**163**	-
	112.00	Ø9	2	**164**	-
92	140.00	M8	4	**088**	-
	145.00	M10	4	**089**	-


"-": configuration out of ISO & SAE Standard

Spigot hole [mm]	PCD	Ø	Nr. holes	Code	Type
95	115.00	M8	4	137	-
	127.00	M10	4	131	-
98.4	125.00	Ø11	4	128	-
100	125.00	M10	2	023	ISO3019-2-100-B4
	125.00	M10	4	025	ISO3019-2-100-B2
	125.00	Ø11	4	031	-
	125.00	M5	4	032	-
	190.00	Ø15	4	038	-
	125.00	Ø13	4	041	-
	125.00	M12	2	071	-
	140.00	M12	2	072	-
	146.00	M12	2	075	-
	126.00	M10	2	106	-
	120.00	M8	4	122	-
	160.00	M10	4	141	-
	150.00	M10	4	150	-
101.6	161.50	M12	4	029	-
	146.00	M12	2	070	SAE B 101-2
	127.00	M12	4	125	-
	146.00	M10	2	159	-
	127.00	M10	4	224	-
105	146.00	M12	2	076	-
110	175.00	M10	4	110	-
	130.00	M8	4	154	-
	200.00	M10	4	202	-
	135.00	M10	4	219	-
	145.00	M12	4	273	-
112	140.00	M12	2	074	-
	140.00	M10	2	138	-
	130.00	M10	4	264	-
115	180.00	M12	4	198	-
116	160.00	M14	2	084	-
120	210.00	M16	2	094	-
	145.00	M10	4	155	-
	150.00	Ø13	4	267	-
125	160.00	M12	4	026	ISO3019-2-125-B4
	160.00	Ø13	4	033	-
	160.00	M12	2	079	-
	180.00	M16	2	082	ISO3019-2-125-B2
	155.00	M10	4	102	-
	160.00	Ø17	4	113	-
	200.00	M12	4	114	-
	181.20	M16	2	136	-
	200.00	M16	4	200	-
	180.00	ø20	4	215	-
	170.00	ø18	4	237	-
127	161.50	M12	4	021	-
	181.20	M16	2	080	SAE C 127-2
	161.50	M14	4	140	-
130	165.00	Ø11	4	054	-
	150.00	M12	4	068	-
	181.20	M16	2	085	-
	165.00	M12	4	124	-
	165.00	M14	4	135	-


"-": configuration out of ISO & SAE Standard

Spigot hole [mm]	PCD	Ø	Nr. holes	Code	Type
130	165.00	M10	4	253	-
135	160.00	M10	4	151	-
	175.40	M12	4	220	-
140	180.00	M14	4	077	ISO3019-2-140-B4
	180.00	M12	2	081	-
	165.00	M10	4	157	-
	200.00	M16	4	176	ISO3019-2-140-B2
	165.00	Ø11	4	223	-
	180.00	M16	2	232	-
150	185.00	M16	4	069	-
152.4	228.60	M16	4	022	-
	228.60	M18	2	090	-
	228.60	M18	4	108	-
	217.50	Ø17	4	118	-
	228.60	M20	2	166	SAE D 152-2
	228.60	M20	4	192	SAE D 152 -4
	190.50	M8	4	207	-
160	200.00	M16	4	027	ISO3019 - 2 -160 B4
	200.00	Ø17	4	035	-
	200.00	M16	2	091	-
	224.00	M20	2	092	ISO3019 - 2 -160 B2
	200.00	M12	2	107	-
	230.00	M22	4	111	-
	185.00	M12	4	152	-
	224.00	M16	4	184	-
	230.00	Ø22	4	228	-
162	188.00	M12	4	263	-
165.1	317.35	M20	4	143	SAE E 165 - 4
	317.35	M24	2	145	SAE E 165 - 2
	229.00	M20	4	201	-
	317.35	M18	4	204	-
175	200.00	M12	4	153	-
	230.00	M18	2	185	-
177.8	350.00	M24	4	146	SAE F 177 - 4
	216.00	M12	4	222	-
	350.00	M24	2	203	SAE F 177 - 2
180	216.00	Ø13	4	055	-
	216.00	M16	4	078	-
	224.00	M16	4	112	ISO3019 - 2 -180 B4
	216.00	M12	4	132	-
	215.00	M22	4	148	-
	230.00	M22	4	226	-
200	250.00	M20	4	028	ISO3019 - 2 -200 B4
	250.00	Ø22	4	095	-
	280.00	M24	2	117	-
	230.50	M12	4	214	-
203.2	254.00	M14	4	210	-
205	240.00	M16	4	133	-
224	280.00	M20	4	144	ISO3019 - 2 -224 B4
	280.00	Ø22	4	205	-
250	310.00	M24	4	238	-
	315.00	M20	4	282	ISO3019 - 2 -250 B4
275	355.00	M16	4	233	-
	355.00	Ø18	4	281	-

"-": configuration out of ISO & SAE Standard

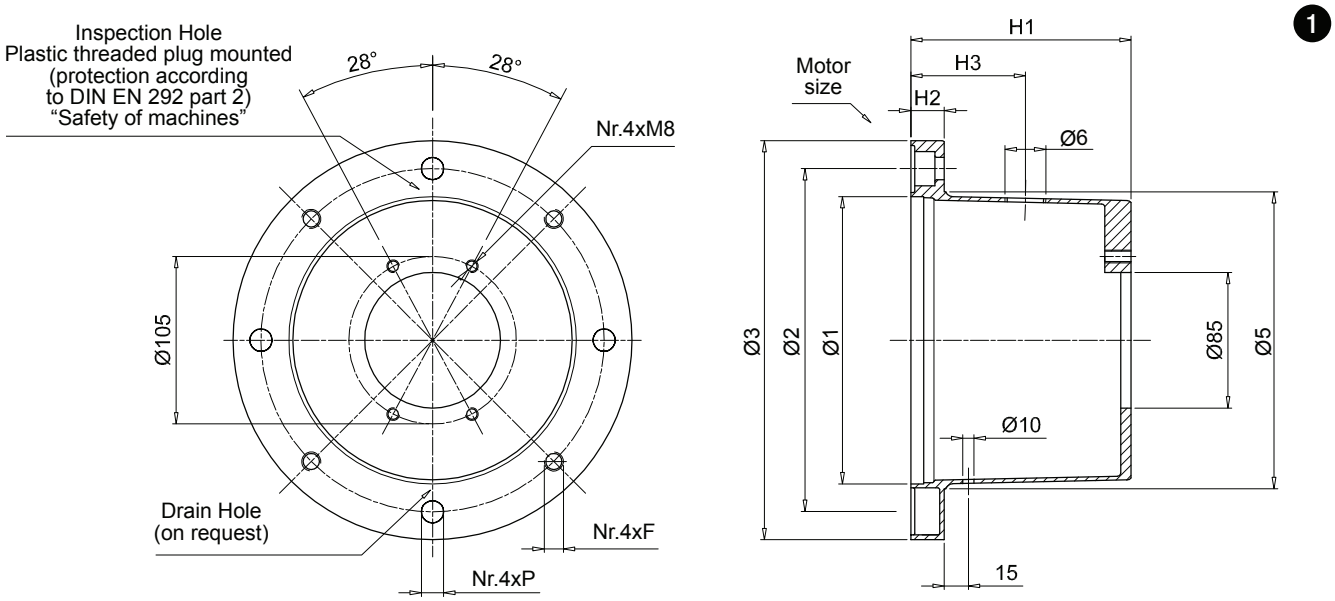

IEC - Electric motors		Motor base	Dimensions [mm]								On request		Weight
Motor size	Shaft end [Ø x L]	code	Ø1	Ø2	Ø3	Ø5	H1	H2	F	P	H3	Ø6	[kg]
80	19x40	**BMC200A1001**	130	165	200	135	100	18	M10	11	60	3/4"	0.75
90	24x50	**BMC200A1251**	130	165	200	135	125	18	M10	11	75	3/4"	0.95
100-112	28x60	**BMC250A1141**	180	215	250	186	114	19	M12	14	80	3/4"	1.60
		BMC250A1361	180	215	250	186	138	19	M12	14	100	3/4"	1.60
132	38x80	**BMC300A1551**	230	265	300	235	155	23	M12	14	95	3/4"	3.30

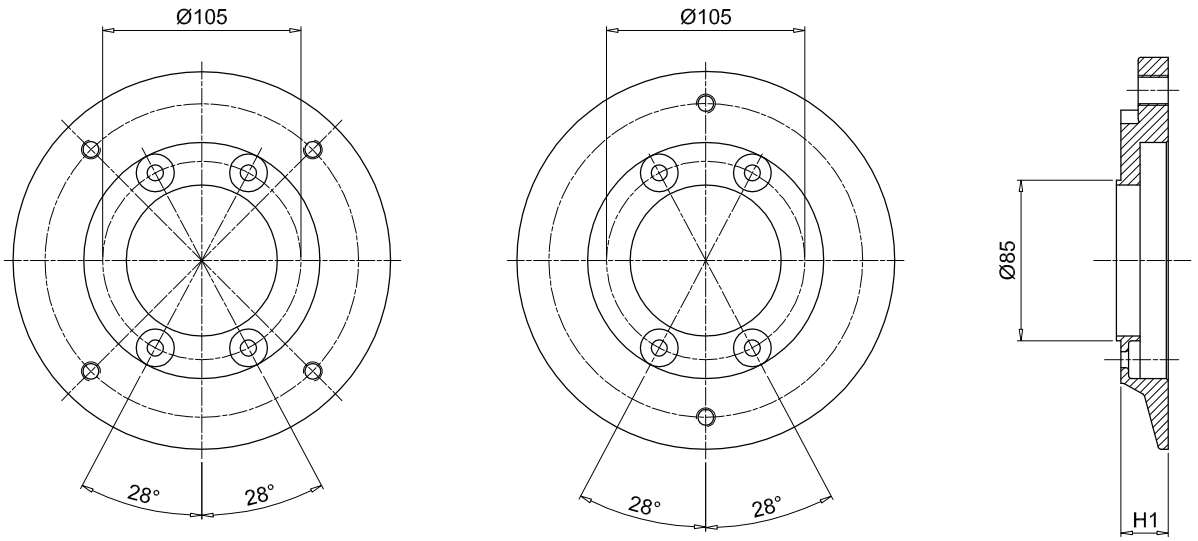


4 Bolt Version


2 Bolt Version

Pump flange code	H1	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FR1023* **	23	KVG1 See page 107	D042 - S061 - S063 -S083 - S023 - S070 -S071 - S082 - S075	S024 - S025 - S125 - S154	0.25
FR1025* **	25		S080 - S082	S021 - S026 - S068 -S069	0.30
FR1033* **	33		S023 - S070 - S071 - S072 -S074 S080 -S082	S021 - S026 - S027	0.80
FR1035* **	35		S060 - S063 -S065	-	0.90
FR1040* **	40		-	S098 - S227	1.10
FR1079* **	79		-	S031	1.30

Pump flange code to be complete with available pump interface
Example: **FR1023S024**

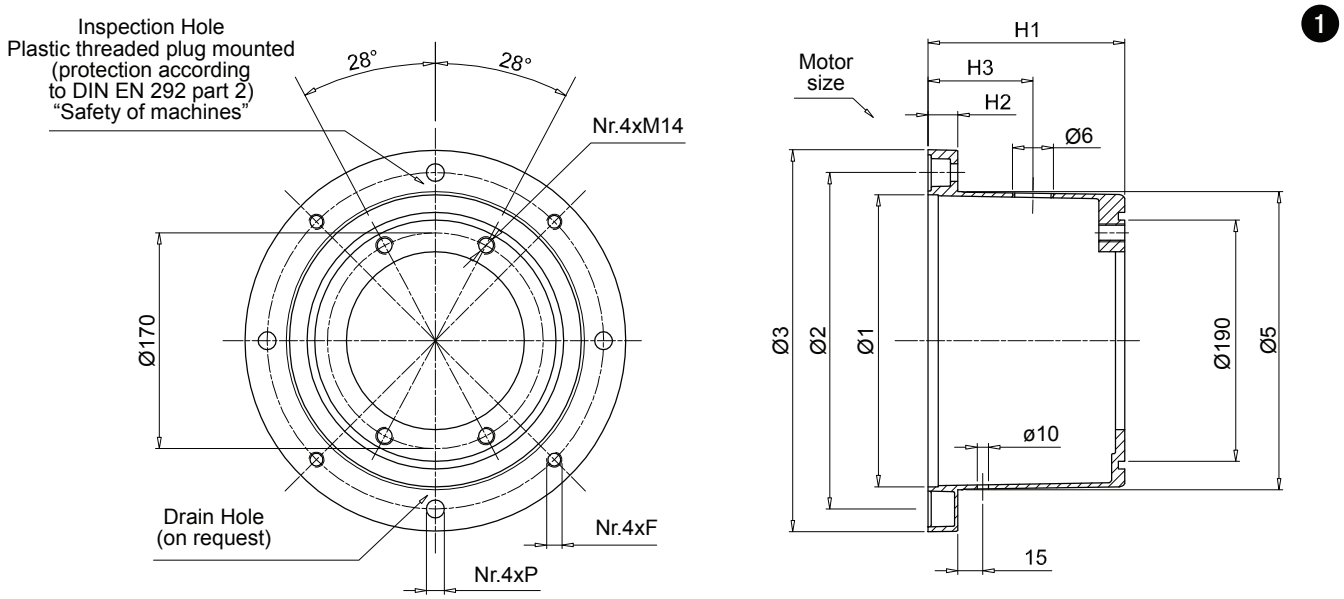

IEC - Electric motors		Motor base	Dimensions [mm]								On request		Weight
Motor size	Shaft end [Ø x L]	code	Ø1	Ø2	Ø3	Ø5	H1	H2	F	P	H3	Ø6	[kg]
132	38x80	**BMC300A1555**	230	265	300	235	155	23	M12	14	95	3/4"	3.3
		BMC300A1705	230	265	300	235	170	23	M12	14	110	3/4"	3.6
160	42x110	**BMC350A1785**	250	300	350	254	178	31	M16	18	100	1"	4.4
180	48x110	**BMC350A1945**	250	300	350	254	194	31	M16	18	115	1"	4.9

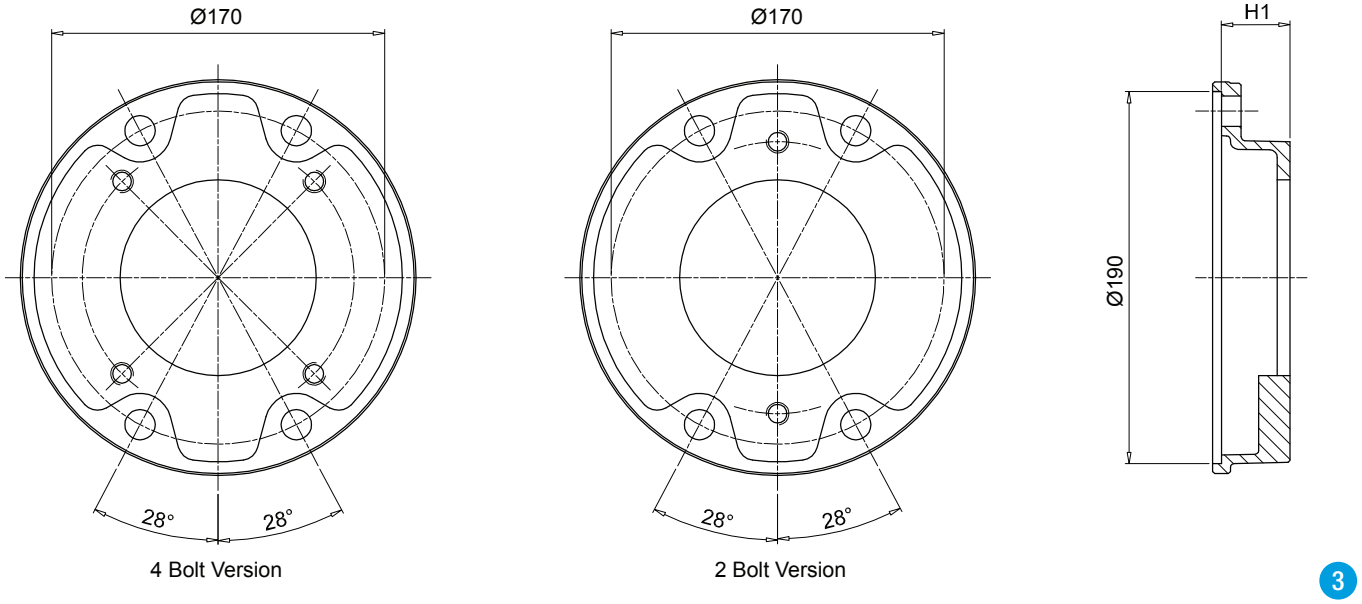


4 Bolt Version


2 Bolt Version

Pump flange code	H1	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP5026* **	26	KVG5 See page 107	S023 - D042 - S063 - S070 - S072 S075	S024 - S024 -S033 - S125 - S154	1.0
FP5032* **	32		-	S024 - S031 - S096 - S125	1.1
FP5035* **	35		S023 - D042 - S063 - S070 - S072 - S075 - S060 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S031 - S059 - S068 - S083 - S097 - S125 - S141	0.9
FP5045* **	45		S060 - S070 - S071 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S068 - S125 -S141	0.9
FP5056* **	56		S072	S021 - S026	1.6
FP5063* **	63		S070 - S079 - S138	S021 - S025 - S068 -S141	1.7
FP5091* **	91		-	S025 - S031 - S033 - S113 - S267	2.2


Pump flange code to be complete with available pump interface

Example: **FP5026S023**

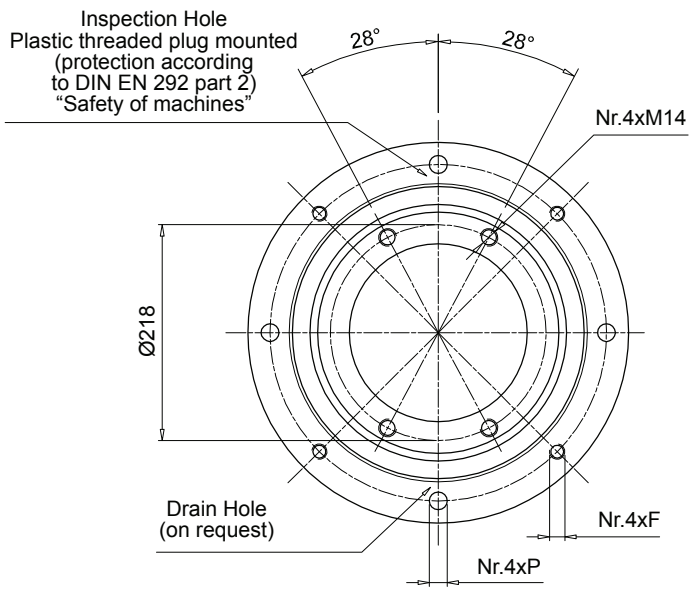


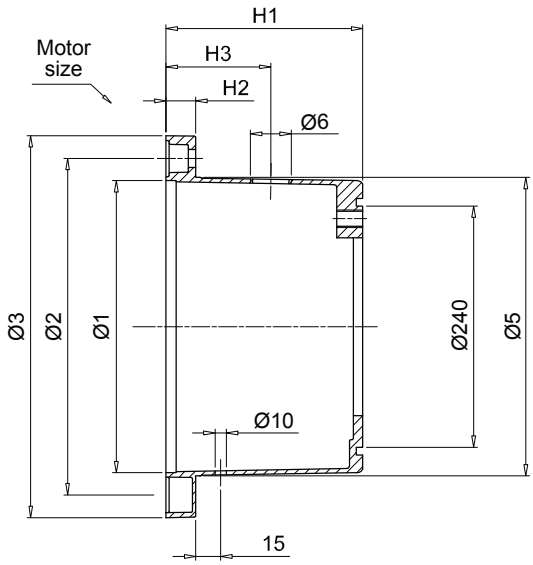


IEC - Electric motors		Motor base	Dimensions [mm]								On request		Weight
Motor size	Shaft end [Ø x L]	code	Ø1	Ø2	Ø3	Ø5	H1	H2	F	P	H3	Ø6	[kg]
160	42x110	**BMC350A1786**	250	300	350	254	178	31	M16	18	100	1"	4.4
180	48x110	**BMC350A1946**	250	300	350	254	194	31	M16	18	115	1"	1.9
200	55x110	**BMC400A2016**	300	350	400	305	201	31	M16	18	125	1 1/2"	6.9

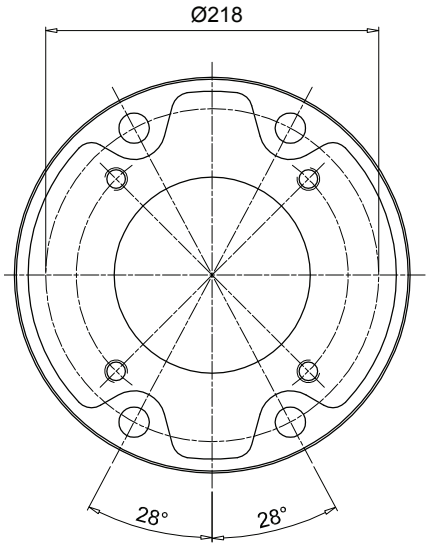

4 Bolt Version

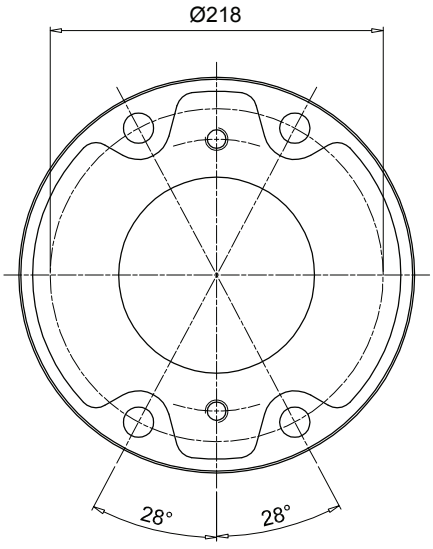


2 Bolt Version

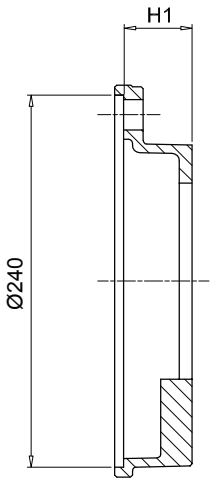


Pump flange code	H1	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP6032* **	32	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45		S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58		S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70		S080	-	3.0
FP6082* **	82		S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86		S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101		-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110		S080	S111	5.5

Pump flange code to be complete with available pump interface
Example: **FP6032S021**

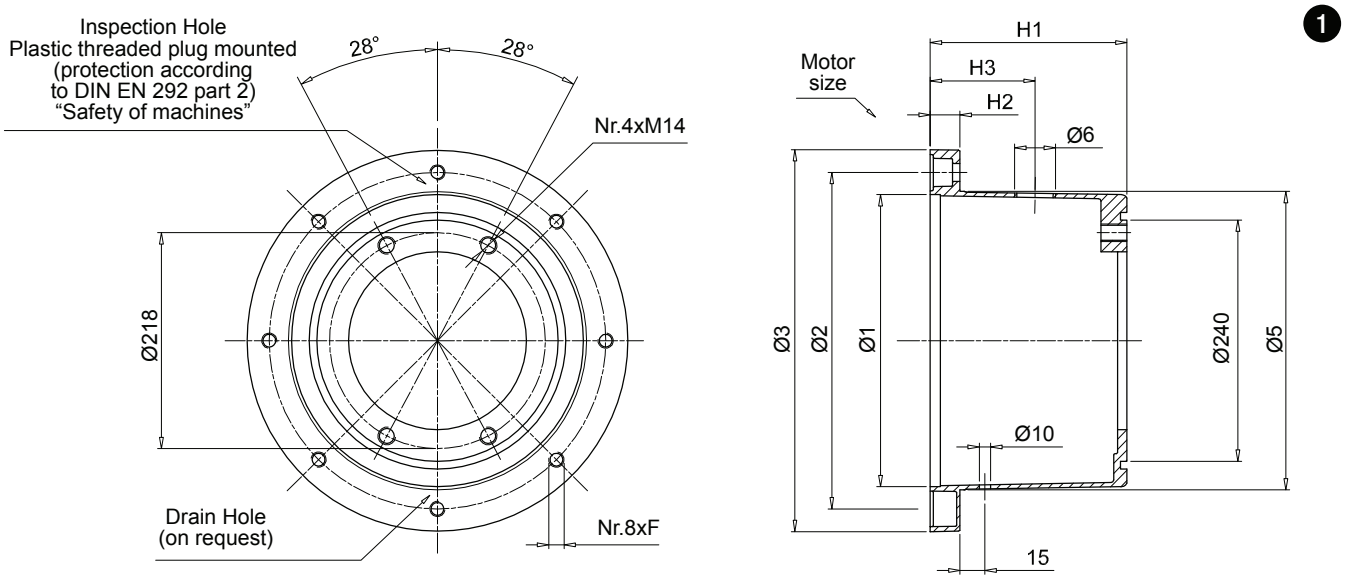

1


IEC - Electric motors		Motor base code	Dimensions [mm]								On request		Weight [kg]
Motor size	Shaft end [Ø x L]		Ø1	Ø2	Ø3	Ø5	H1	H2	F	P	H3	Ø6	
225	60x140	**BMC450A2506**	350	400	450	350	250	31	M16	-	175	1 1/2"	6.9

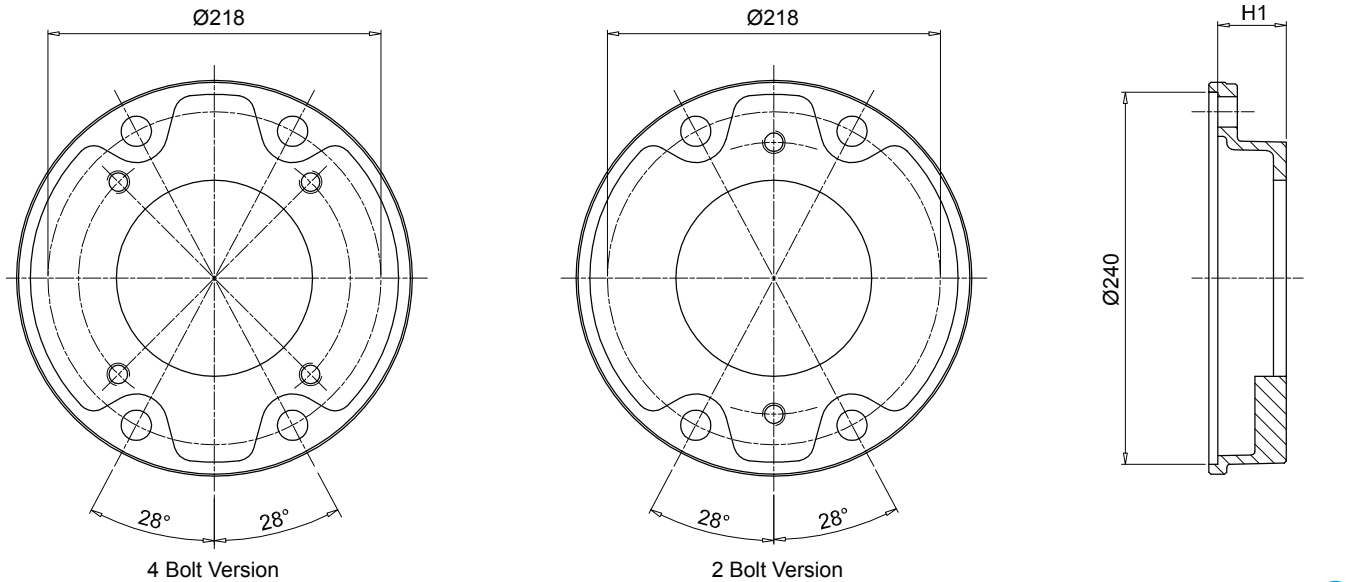


3

Pump flange code	H1	Mounting kit	Available pump interface		Weight [kg]
			2 Bolt	4 Bolt	
FP6032* **	32	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45		S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58		S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70		S080	-	3.0
FP6082* **	82		S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86		S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101		-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110		S080	S111	5.5

Pump flange code to be complete with available pump interface
Example: **FP6032S021**

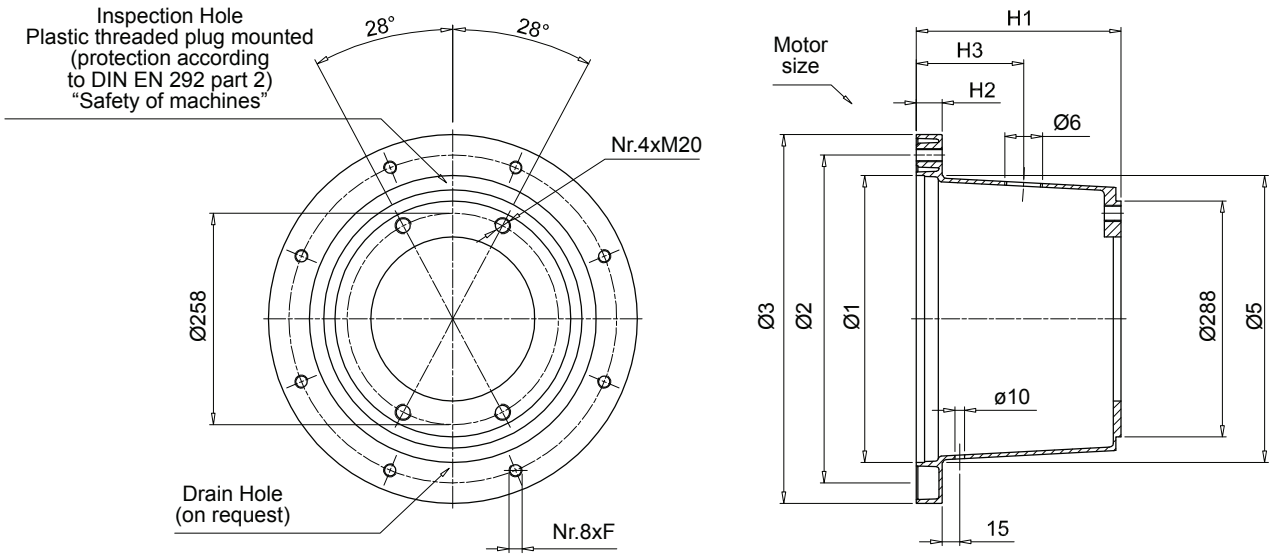


IEC - Electric motors		Motor base code	Dimensions [mm]								On request		Weight [kg]
Motor size	Shaft end [Ø x L]		Ø1	Ø2	Ø3	Ø5	H1	H2	F	P	H3	Ø6	
225	60x140	**BMC450A2507**	350	400	450	350	250	31	M16	-	175	1 1/2"	6.9

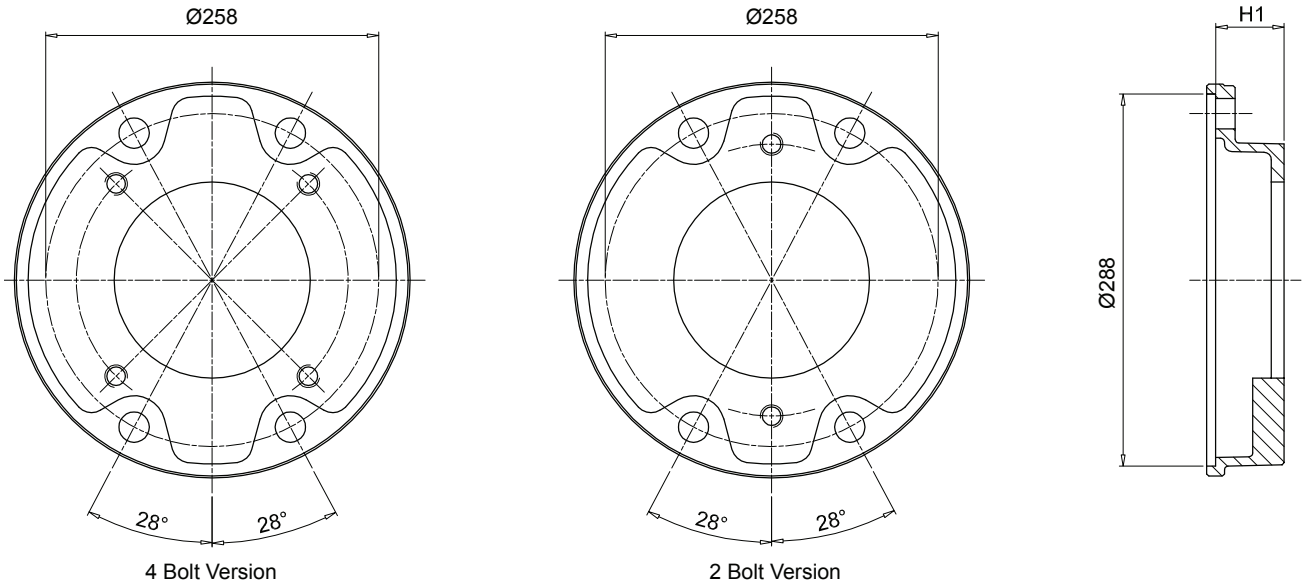


Pump flange code	H1	Mounting kit	Available pump interface		Weight [kg]
			2 Bolt	4 Bolt	
FP7052* **	52	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66		S090 - S092 - S166	-	4.8
FP7069* **	69		-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86		S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111		S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3

Pump flange code to be complete with available pump interface
Example: **FP7052S028**

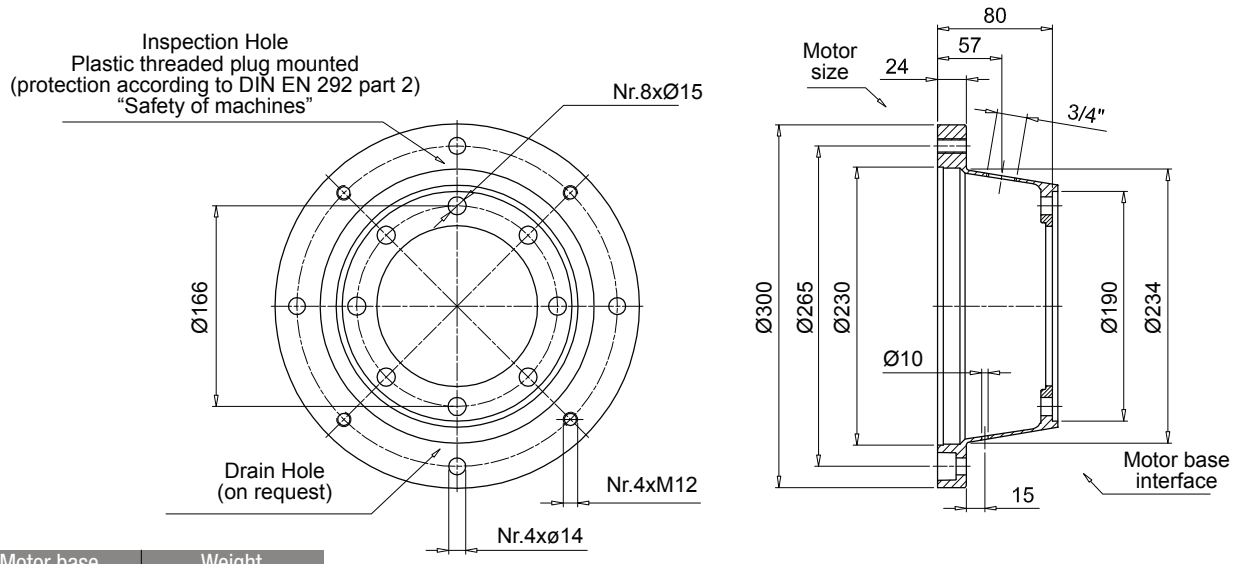

Motor base code	Weight [kg]
BMT300A0805	1.95

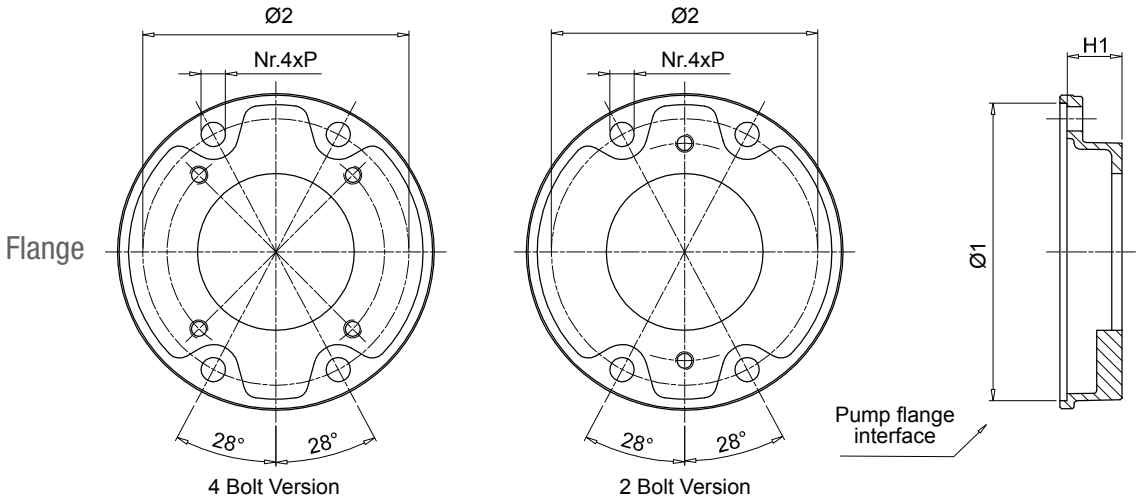


Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP5026* **	26	190	170	15	KVG5 See page 107	S023 - D042 - S063 - S070 - S072 S075	S024 - S024 - S033 - S125 - S154	1
FP5032* **	32					-	S024 - S031 - S096 - S125	1.1
FP5035* **	35					S023 - D042 - S063 - S070 - S072 - S075 - S060 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S031 - S059 - S068 - S083 - S097 - S125 - S141	0.9
FP5045* **	45					S060 - S070 - S071 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S068 - S125 - S141	0.9
FP5056* **	56					S072	S021 - S026	1.6
FP5063* **	63					S070 - S079 - S138	S021 - S025 - S068 - S141	1.7
FP5091* **	91					-	S025 - S031 - S033 - S113 - S267	2.2
FP6032* **	32	240	218	17	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45					S070 - S075 - S080 - S081 - S082	S021 - S025 - S026 - S027 - S069 - S077 - S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58					S079 - S080 - S081 - S082	S025 - S026 - S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70					S080	-	3.0
FP6082* **	82					S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86					S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101					-	S027 - S035 - S113 - S132 - S148 - S176 - S228	4.2
FP6110* **	110					S080	S111	5.5
FP7052* **	52	288	258	22	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66					S090 - S092 - S166	-	4.8
FP7069* **	69					-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3


Pump flange code to be complete with available pump interface

Example: **FP6032S021**


2

Flange interface

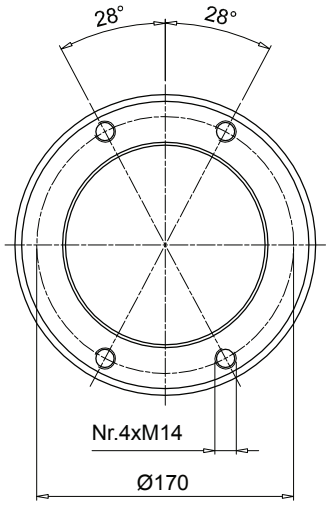


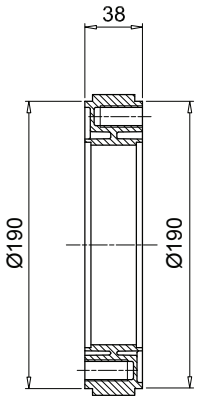



Motor base interface

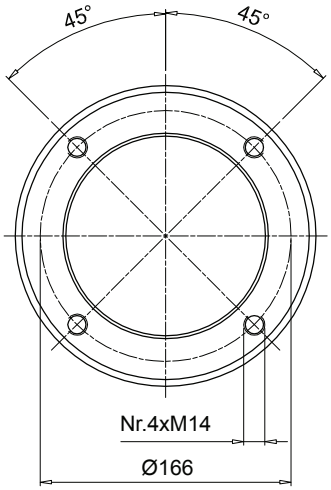


Code	Weight [kg]
AD50385	1.00

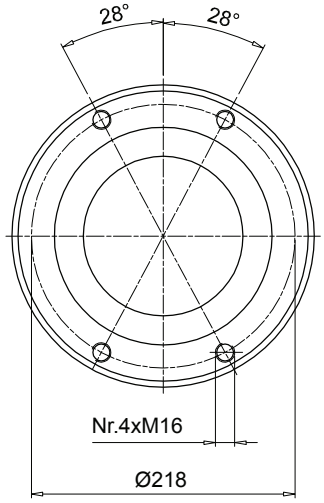


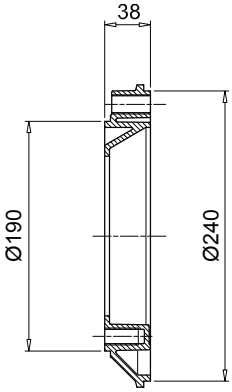


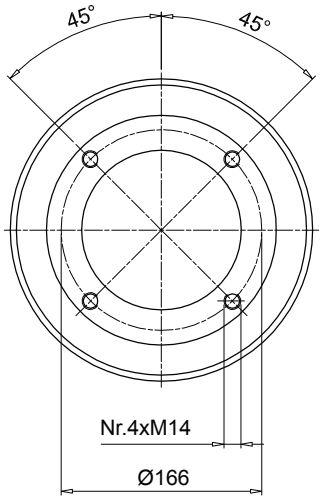


Code	Weight [kg]
AD50386	1.25

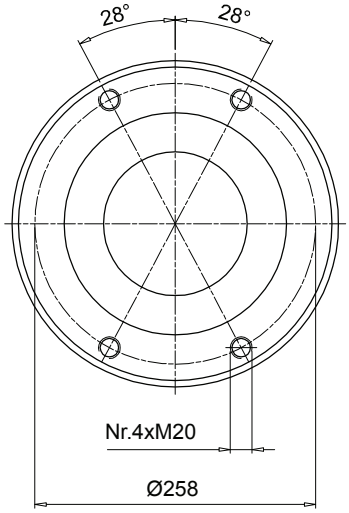

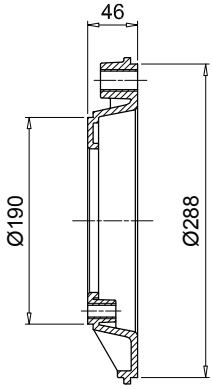


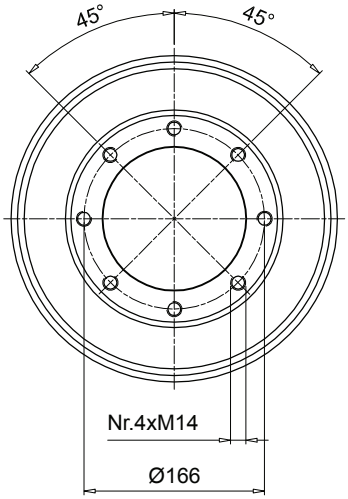

Code	Weight [kg]
AD50467	1.90

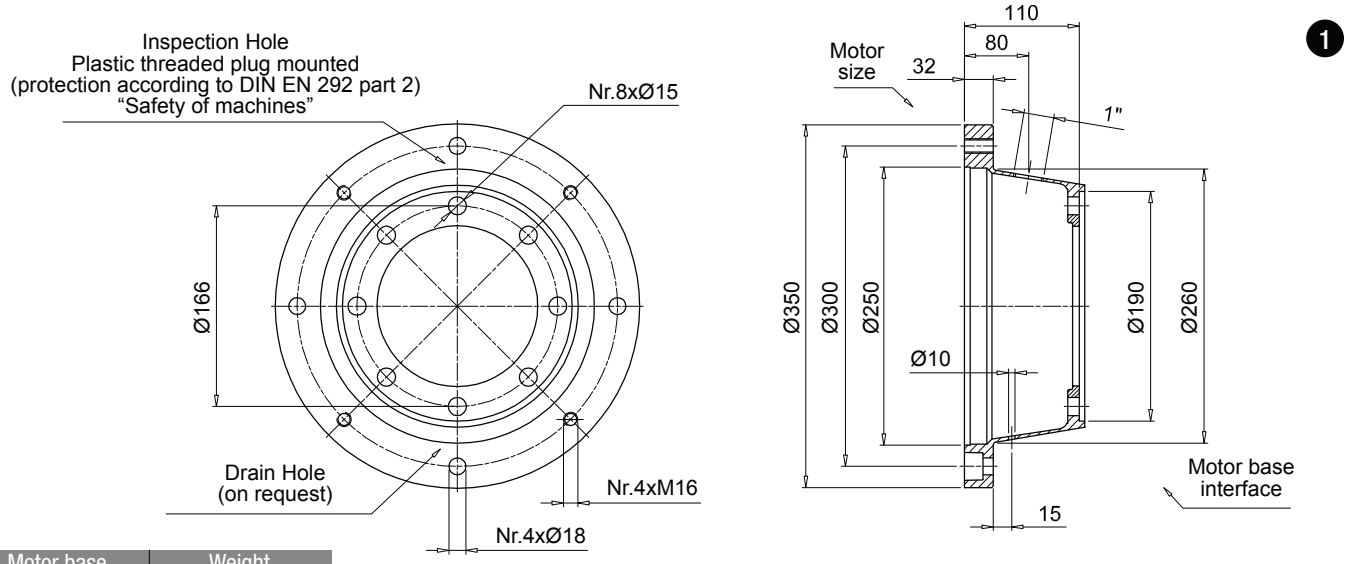

Motor base code	Weight [kg]
BMT350A1105	3.10

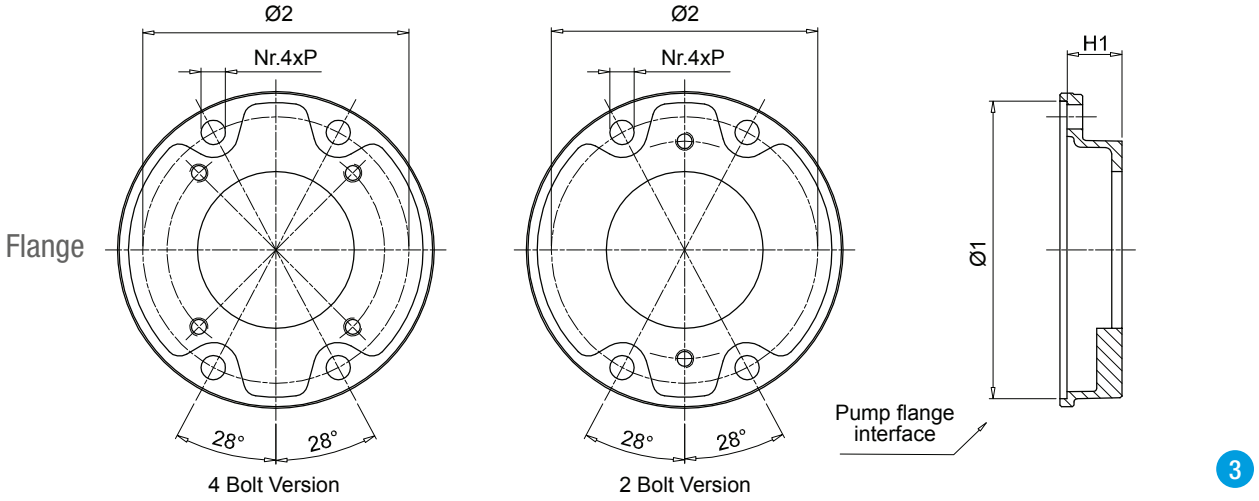


Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP5026* **	26	190	170	15	KVG5 See page 107	S023 - D042 - S063 - S070 - S072 S075	S024 - S024 -S033 - S125 - S154	1
FP5032* **	32					-	S024 - S031 - S096 - S125	1.1
FP5035* **	35					S023 - D042 - S063 - S070 - S072 - S075 - S060 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S031 - S059 - S068 - S083 - S097 - S125 - S141	0.9
FP5045* **	45					S060 - S070 - S071 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S068 - S125 -S141	0.9
FP5056* **	56					S072	S021 - S026	1.6
FP5063* **	63					S070 - S079 - S138	S021 - S025 - S068 -S141	1.7
FP5091* **	91					-	S025 - S031 - S033 - S113 - S267	2.2
FP6032* **	32	240	218	17	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45					S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58					S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70					S080	-	3.0
FP6082* **	82					S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86					S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101					-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110					S080	S111	5.5
FP7052* **	52	288	258	22	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66					S090 - S092 - S166	-	4.8
FP7069* **	69					-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3

Pump flange code to be complete with available pump interface
Example: **FP6032S021**


2

Flange interface


Motor base interface

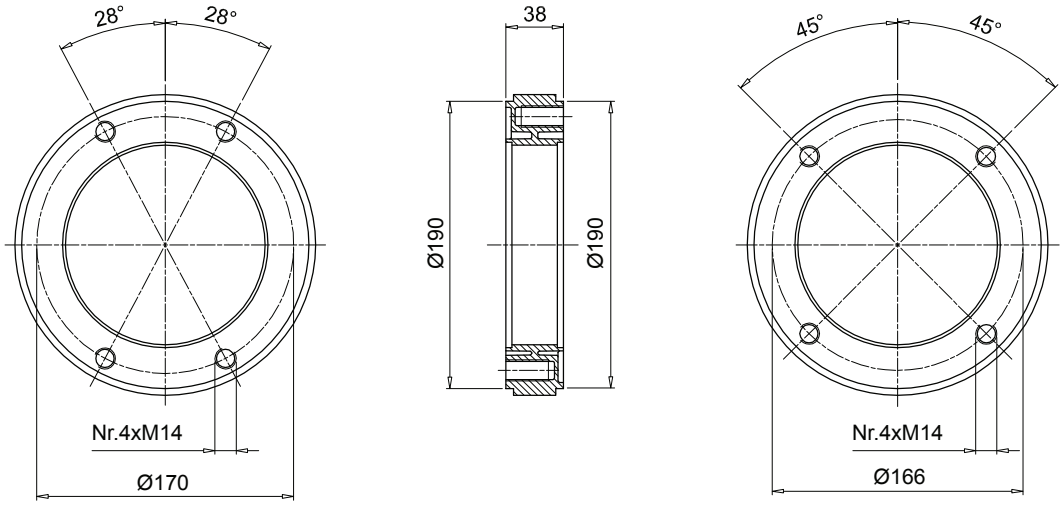


Code	Weight [kg]
AD50385	1.00

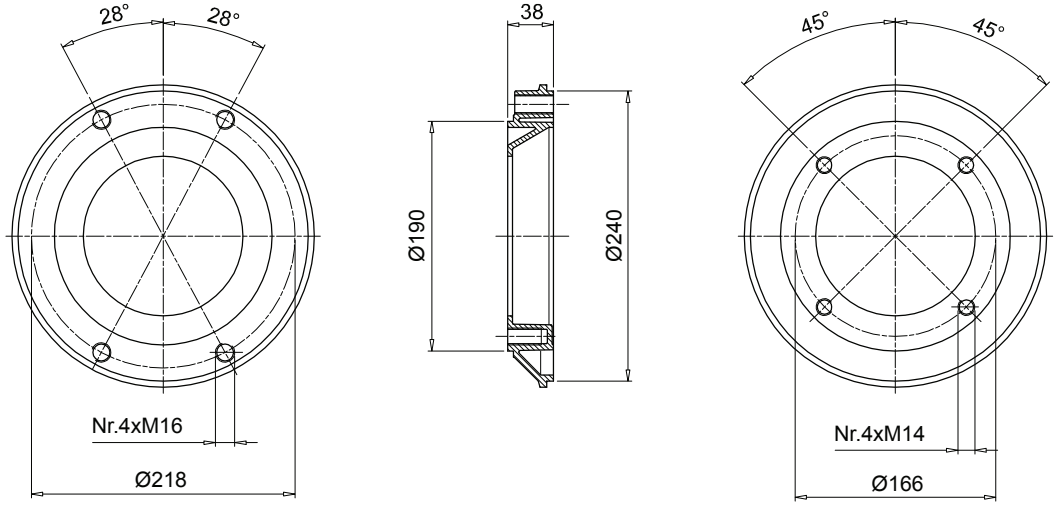


Code	Weight [kg]
AD50386	1.25

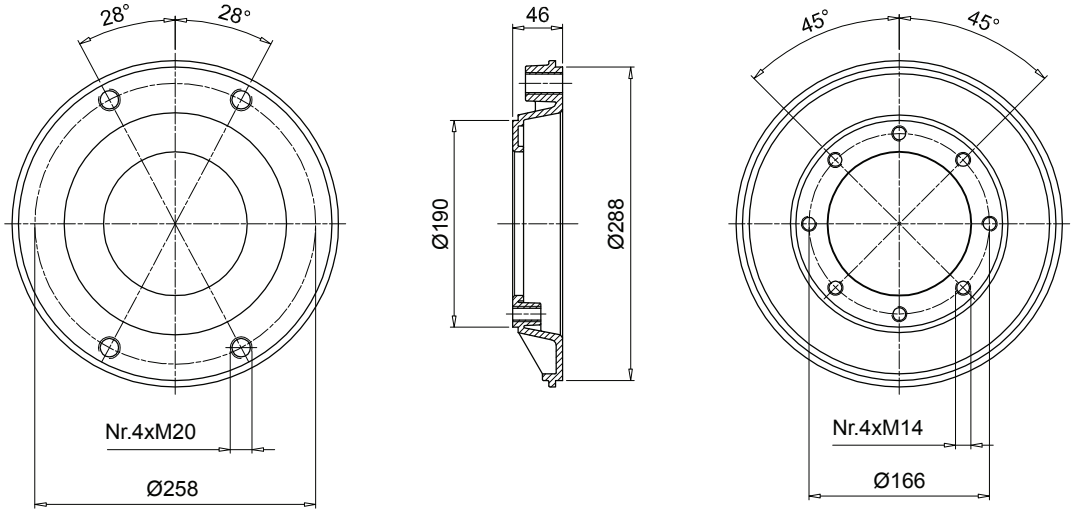


Code	Weight [kg]
AD50467	1.90

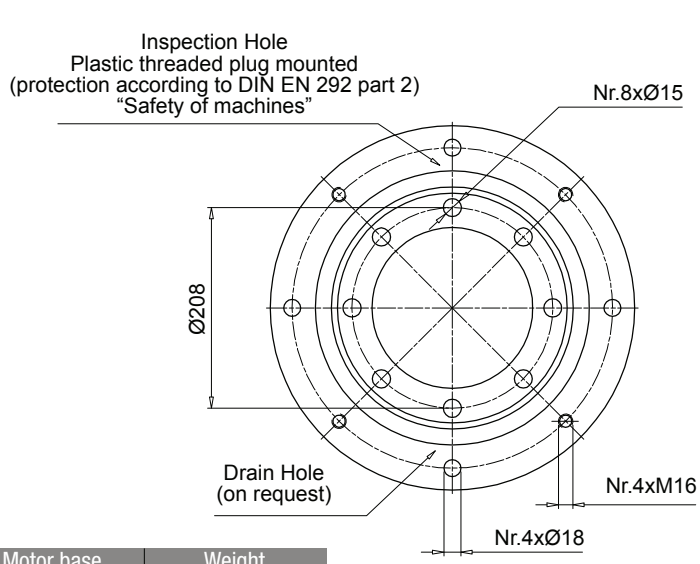

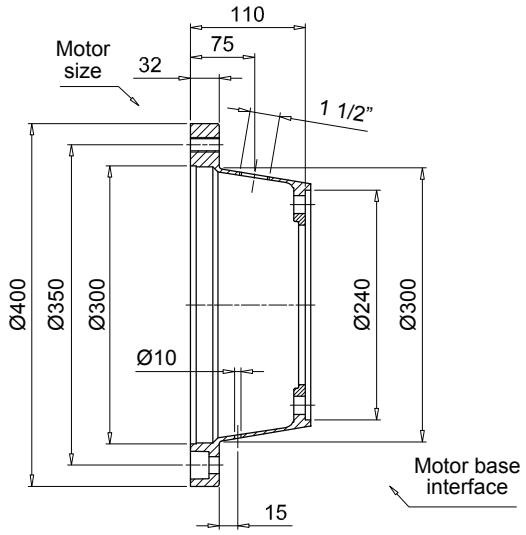

1

Motor base code	Weight [kg]
BMT400A1106	4.90

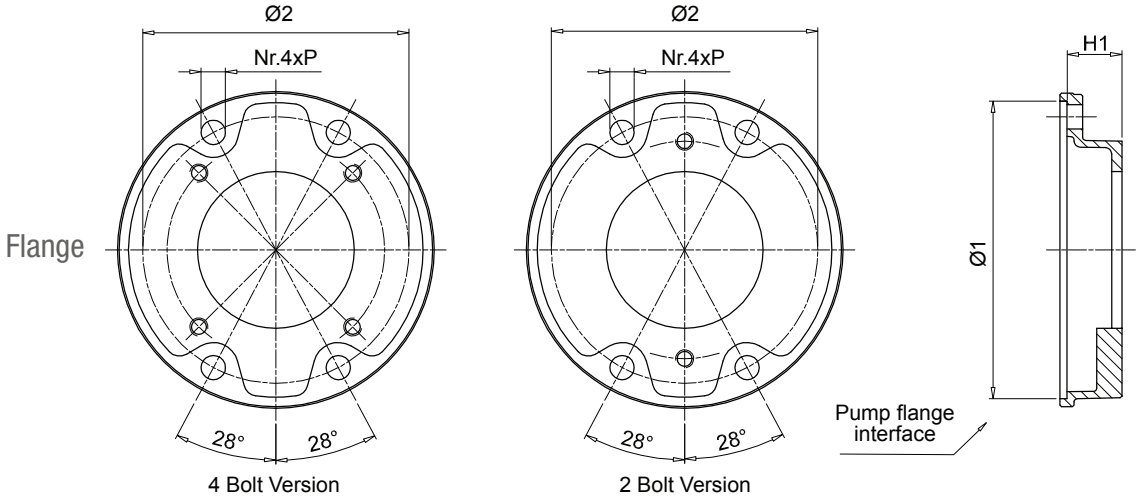

3

Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP5026* **	26	190	170	15	KVG5 See page 107	S023 - D042 - S063 - S070 - S072 S075	S024 - S024 -S033 - S125 - S154	1
FP5032* **	32					-	S024 - S031 - S096 - S125	1.1
FP5035* **	35					S023 - D042 - S063 - S070 - S072 - S075 - S060 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S031 - S059 - S068 - S083 - S097 - S125 - S141	0.9
FP5045* **	45					S060 - S070 - S071 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S068 - S125 -S141	0.9
FP5056* **	56					S072	S021 - S026	1.6
FP5063* **	63					S070 - S079 - S138	S021 - S025 - S068 -S141	1.7
FP5091* **	91					-	S025 - S031 - S033 - S113 - S267	2.2
FP6032* **	32	240	218	17	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45					S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58					S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70					S080	-	3.0
FP6082* **	82					S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86					S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101					-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110					S080	S111	5.5
FP7052* **	52	288	258	22	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66					S090 - S092 - S166	-	4.8
FP7069* **	69					-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3


Pump flange code to be complete with available pump interface

Example: **FP6032S021**


2

Flange interface


Motor base interface

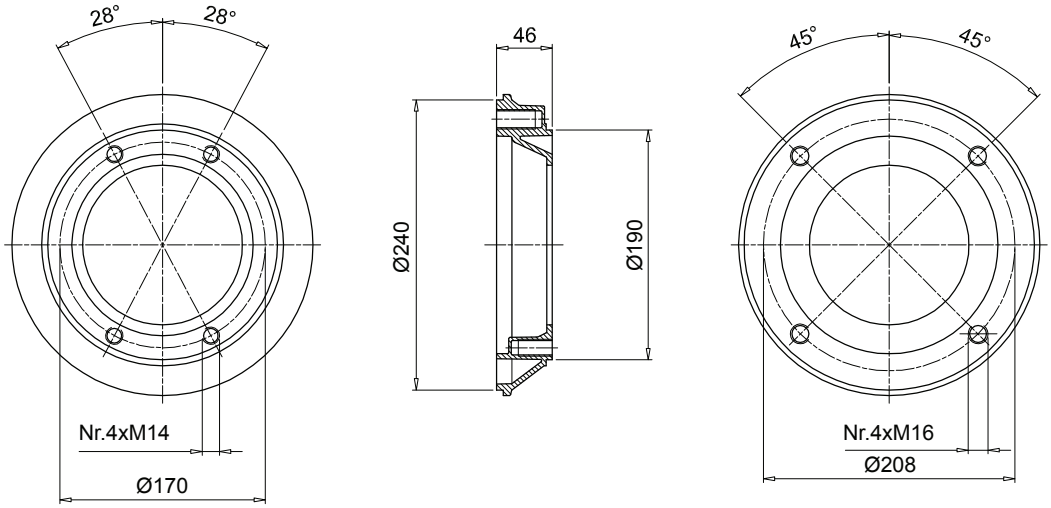


Code	Weight [kg]
AD60465	1.30

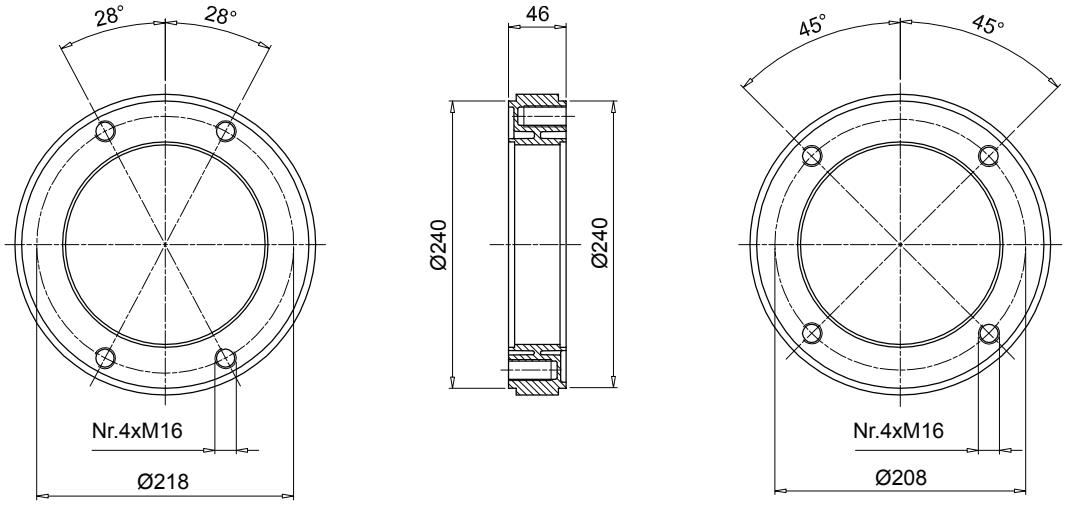


Code	Weight [kg]
AD60466	1.60

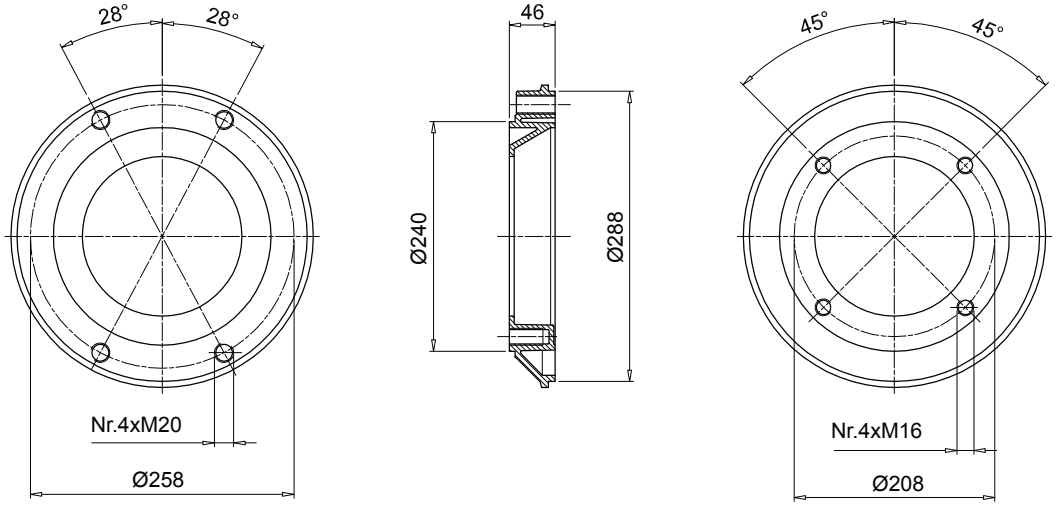

Code	Weight [kg]
AD60467	2.50

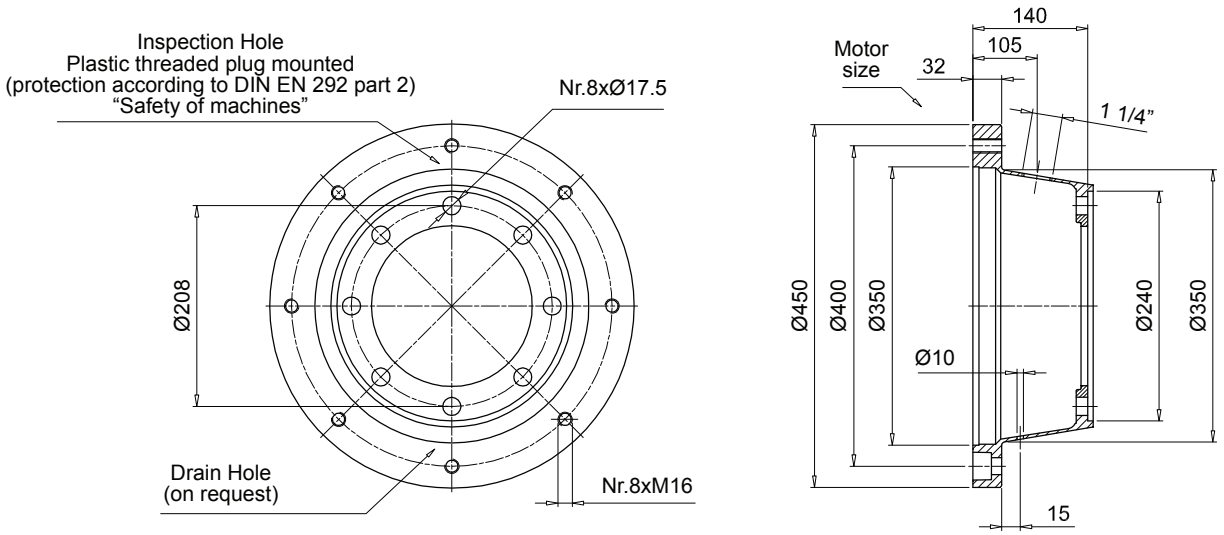

Motor base code	Weight [kg]
BMT450A1406	5.00

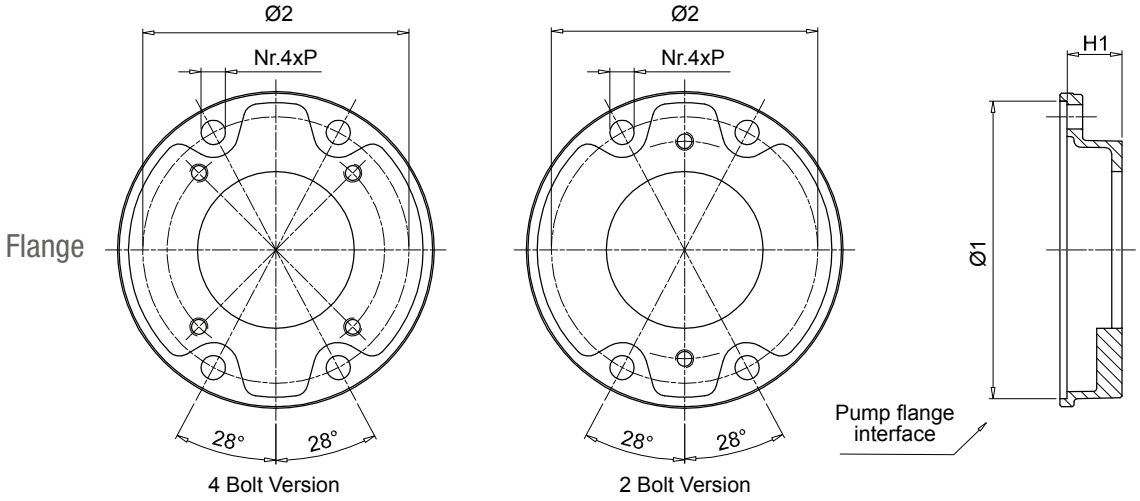


Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP5026* **	26	190	170	15	KVG5 See page 107	S023 - D042 - S063 - S070 - S072 S075	S024 - S024 -S033 - S125 - S154	1.0
FP5032* **	32					-	S024 - S031 - S096 - S125	1.1
FP5035* **	35					S023 - D042 - S063 - S070 - S072 - S075 - S060 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S031 - S059 - S068 - S083 - S097 - S125 - S141	0.9
FP5045* **	45					S060 - S070 - S071 - S072 - S074 - S075 - S106	S021 - S024 - S025 - S026 - S068 - S125 -S141	0.9
FP5056* **	56					S072	S021 - S026	1.6
FP5063* **	63					S070 - S079 - S138	S021 - S025 - S068 -S141	1.7
FP5091* **	91					-	S025 - S031 - S033 - S113 - S267	2.2
FP6032* **	32	240	218	17	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45					S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58					S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70					S080	-	3.0
FP6082* **	82					S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86					S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101					-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110					S080	S111	5.5
FP7052* **	52	288	258	22	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66					S090 - S092 - S166	-	4.8
FP7069* **	69					-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3

Pump flange code to be complete with available pump interface
Example: **FP6032S021**


2

Flange interface


Motor base interface

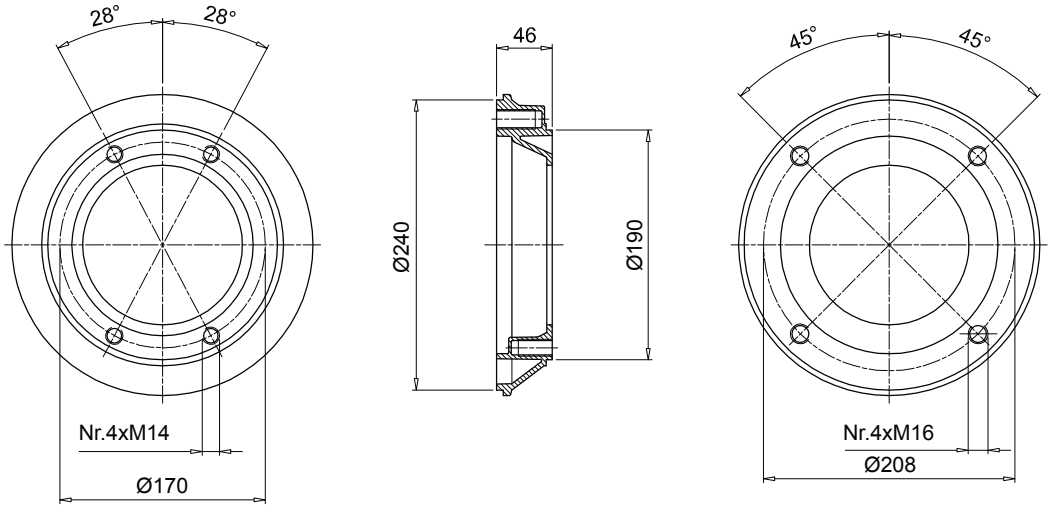

Code	Weight [kg]
AD60465	1.30

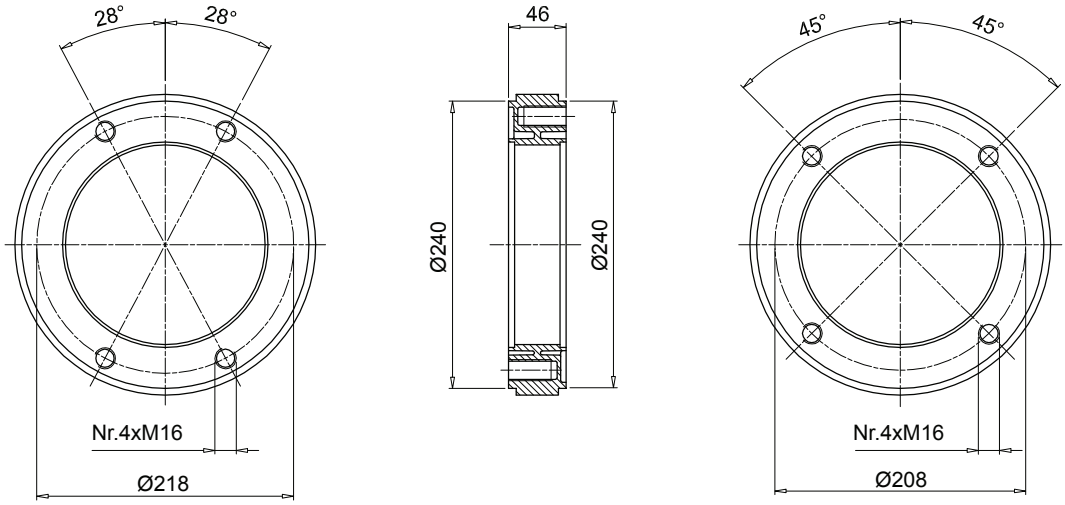


Code	Weight [kg]
AD60466	1.60

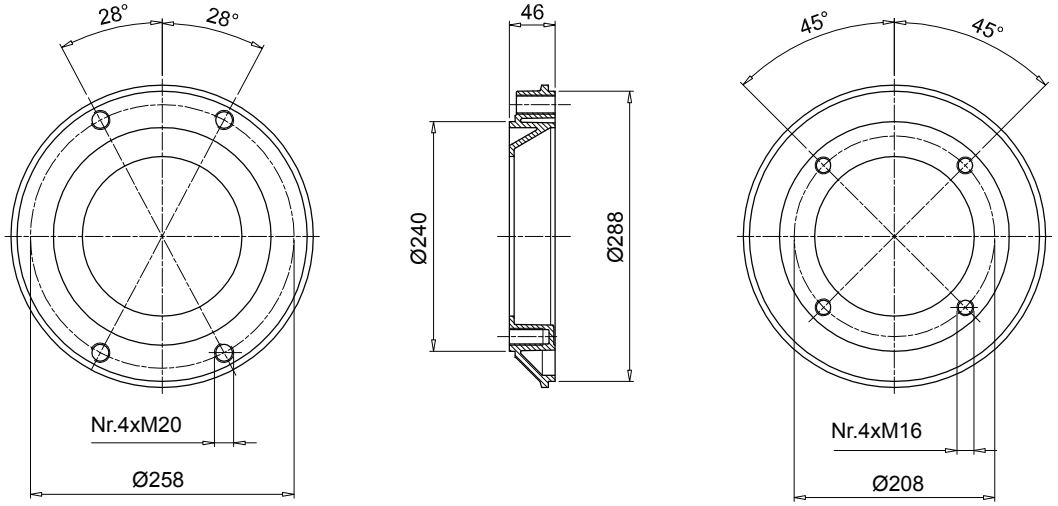


Code	Weight [kg]
AD60467	2.50

1

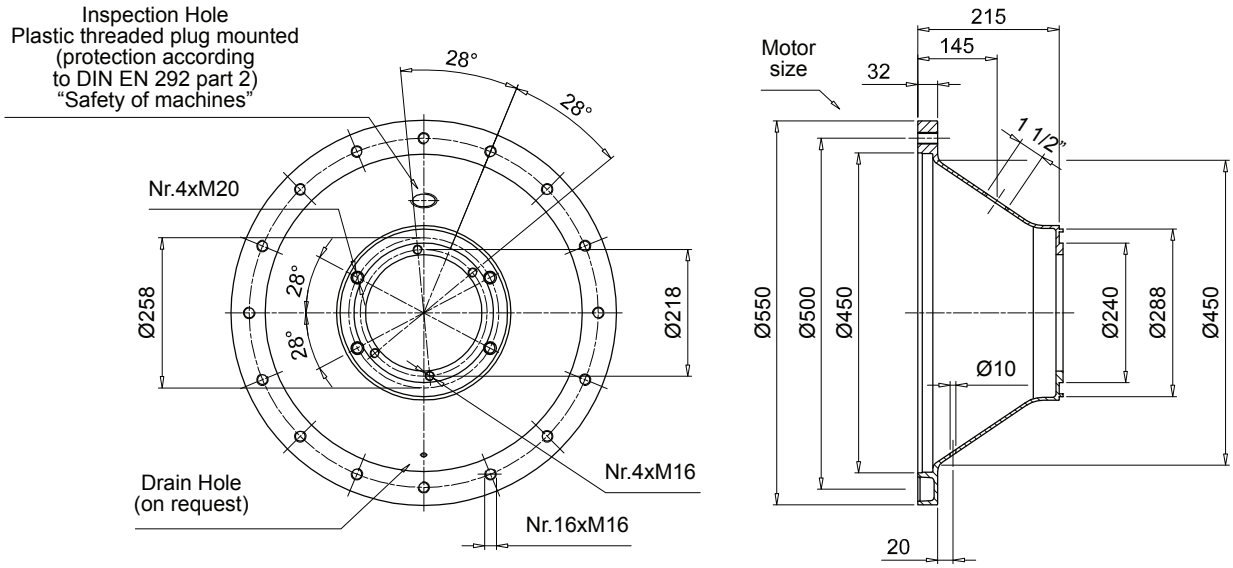

Motor base code	Weight [kg]
BMT550A21567	8.80

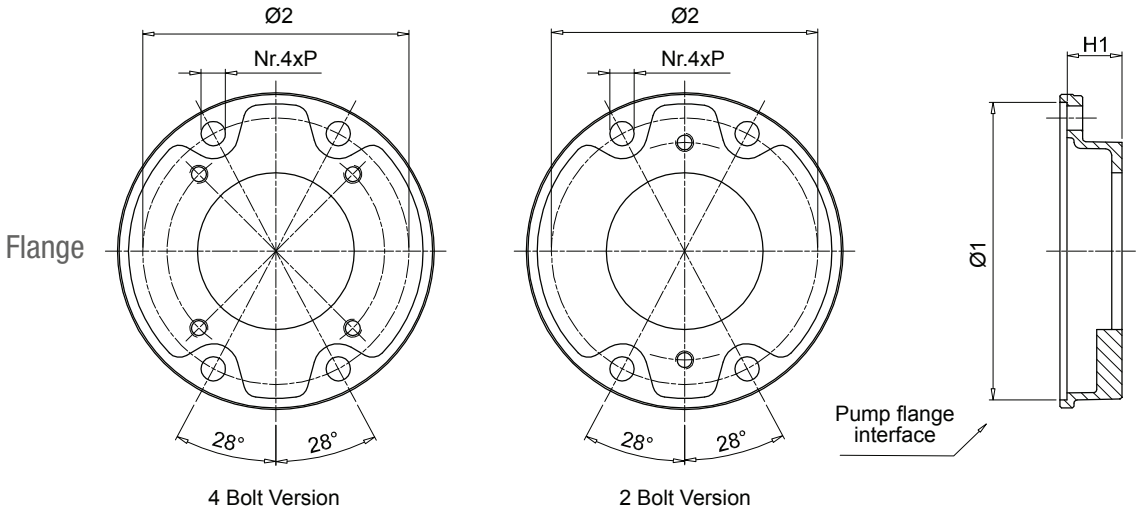


3


Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP6032* **	32	240	218	17	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45					S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58					S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70					S080	-	3.0
FP6082* **	82					S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86					S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101					-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110					S080	S111	5.5
FP7052* **	52	288	258	22	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66					S090 - S092 - S166	-	4.8
FP7069* **	69					-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3

Pump flange code to be complete with available pump interface
Example: **FP6032S021**

1

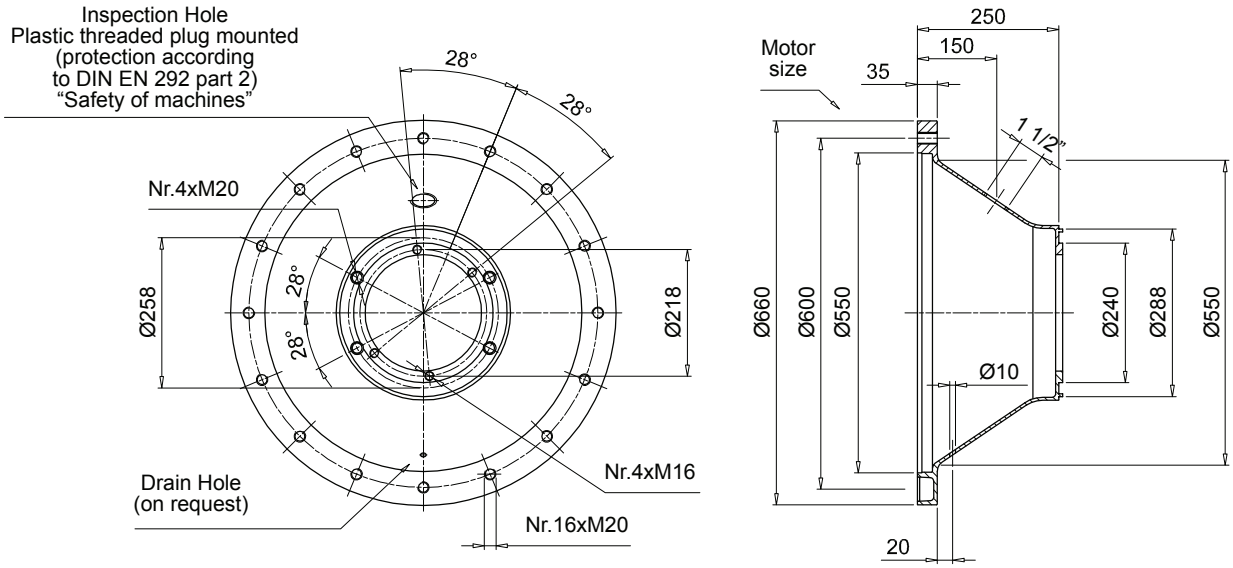

Motor base code	Weight [kg]
BMT660A25067	12.00

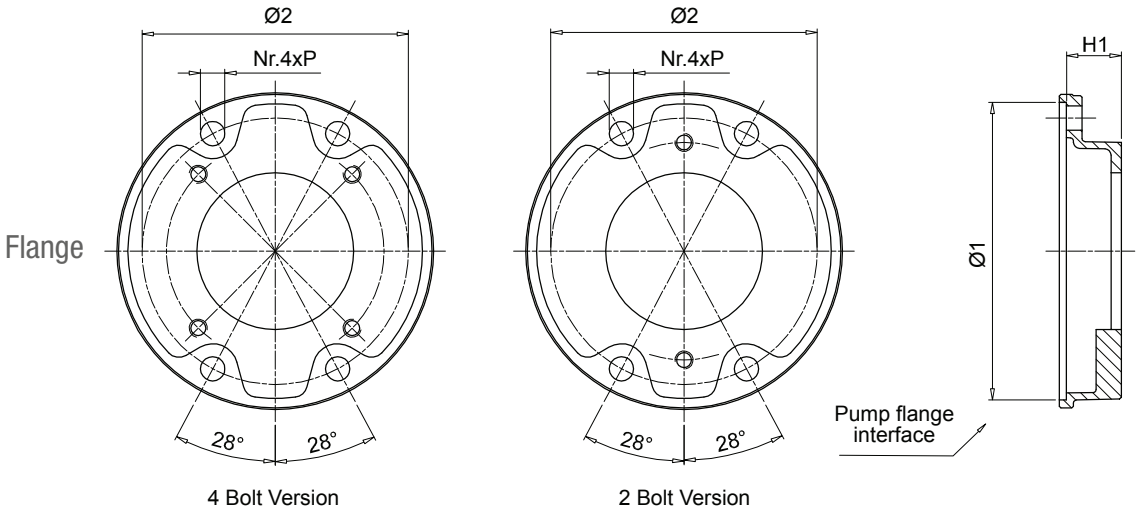


3


Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP6032* **	32	240	218	17	KVG6 See page 107	S081 - S082	S021 - S035	1.8
FP6045* **	45					S070 - S075 - S080 - S081 - S082	S021 -S025 - S026 -S027 - S069 - S077 -S125 - S198 - S207 - S215 - S253	2.1
FP6058* **	58					S079 - S080 - S081 - S082	S025 - S026 -S027 - S038 - S077 - S078 - S207 - S215 - S237	2.4
FP6070* **	70					S080	-	3.0
FP6082* **	82					S080 - S081	S038 - S141 - 198 - 215	3.3
FP6086* **	86					S090 - S092 - S166 - S091	S021 - S026 - S027 - S077 - S078 - S114 - S132 - 198 - S200	3.4
FP6101* **	101					-	S027 - S035 - S113 -S132 - S148 - S176 - S228	4.2
FP6110* **	110					S080	S111	5.5
FP7052* **	52	288	258	22	KVG7 See page 107	-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66					S090 - S092 - S166	-	4.8
FP7069* **	69					-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3

Pump flange code to be complete with available pump interface
Example: **FP6032S021**

1

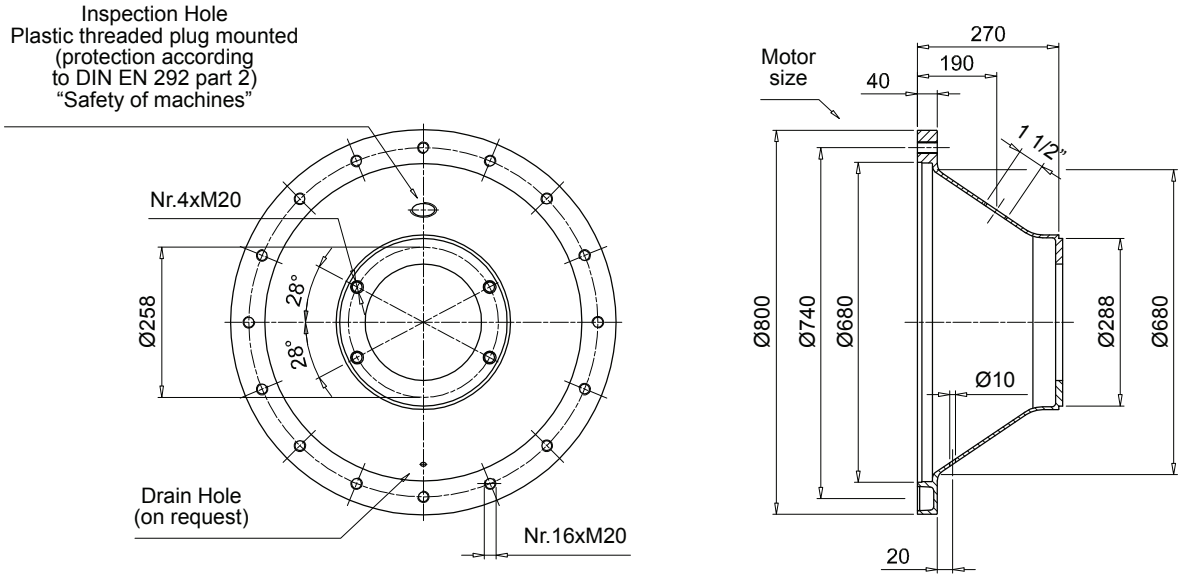

Motor base code	Weight [kg]
BAD800A2707	31.00

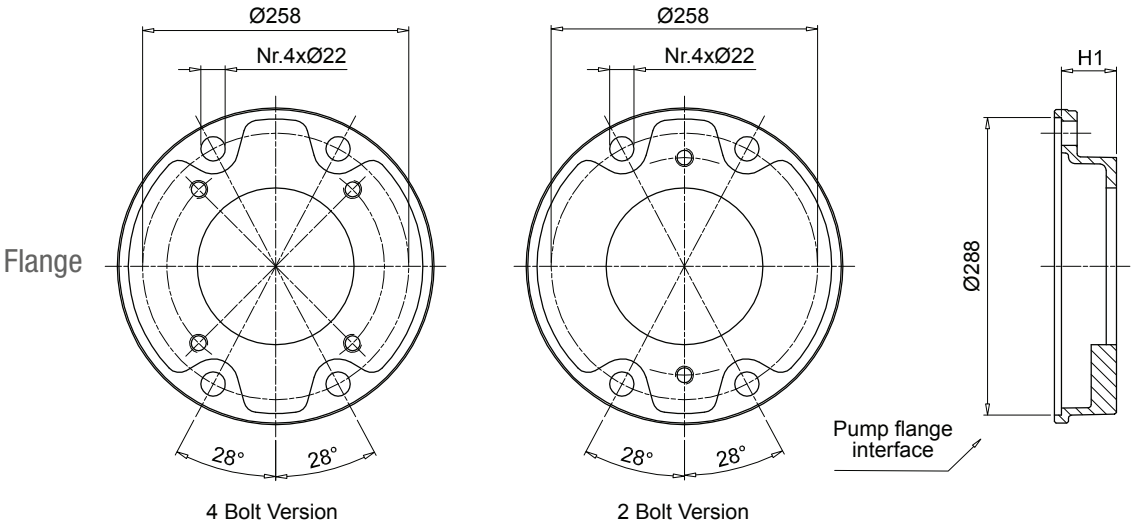


3

Pump flange code	H1	Ø1	Ø2	P	Mounting kit	Available pump interface 2 Bolt	Available pump interface 4 Bolt	Weight [kg]
FP7052* **	52					-	S028 - S108 - S112 - S133 - S192	4.4
FP7066* **	66				KVG7	S090 - S092 - S166	-	4.8
FP7069* **	69	288	258	22	See page 107	-	S108 - S143 - S148 - S192 - S201 - S204 - S281 -S282	4.9
FP7086* **	86					S091 - S092 - S117 - S166 -	S022 - S027 - S028 - S108 - S112 - S184 - S192 - S201 - S228 - S300	5.2
FP7111* **	111					S091 - S092 - S117 - S145	S028 - S108 - S112 - S133 - S184	6.3


Pump flange code to be complete with available pump interface
Example: **FP7052S028**

KVG1

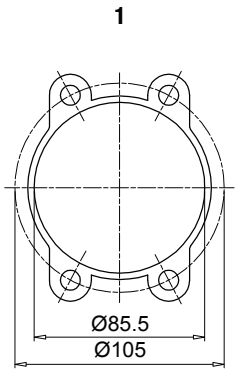


Components				
Item	Description	Q.ty	Material	Torque
1	Gasket for auxiliary flange FR1	1	Paper	-
2	Screw T.C.E.I. M8x20 UNI-5931 8.8	4	Steel	15 Nm

KVG5

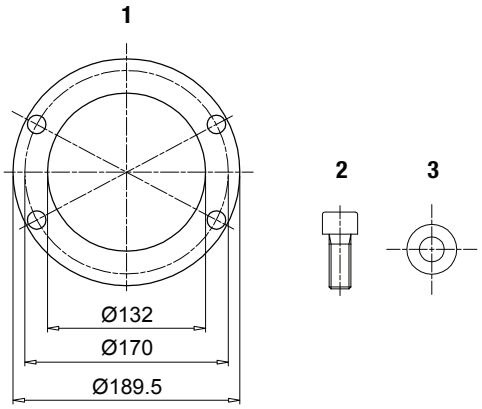


Components				
Item	Description	Q.ty	Material	Torque
1	Gasket for auxiliary flange FP5 / AD5	1	Paper	-
2	Screw T.C.E.I. M14x35 UNI-5931 8.8	4	Steel	90 Nm
3	Washer Schnorr 14	4	Steel	-

KVG6

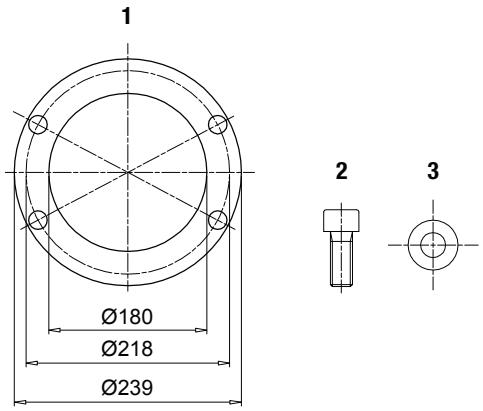

Components				
Item	Description	Q.ty	Material	Torque
1	Gasket for auxiliary flange FP6 / AD6	1	Paper	-
2	Screw T.C.E.I. M16x35 UNI-5931 8.8	4	Steel	130 Nm
3	Washer Schnorr 16	4	Steel	-

KVG7

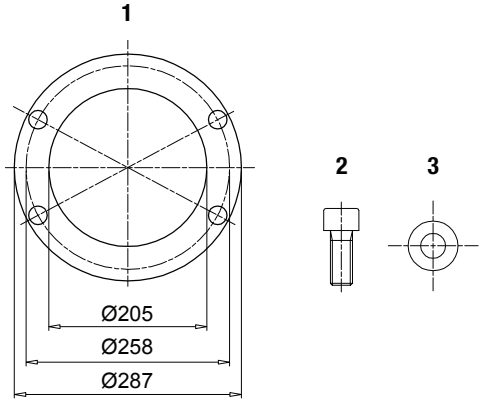

Components				
Item	Description	Q.ty	Material	Torque
1	Gasket for auxiliary flange FP7 / AD7	1	Paper	-
2	Screw T.C.E.I. M20x50 UNI-5931 8.8	4	Steel	200 Nm
3	Washer Schnorr 20	4	Steel	-