
TCSL

OIL FILLER AND BREATHER CAPS WITH LABYRINTH



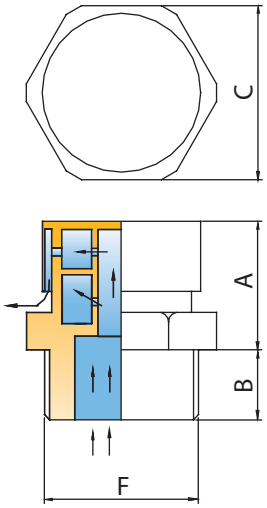


This new-concept breather cap is recommended for:
- reduction units
- machine tools
- compressors, etc.

For "medium" oil splash. It consists of an ample vapour vent chamber.
- Body in brass OT 58
- Oilproof gasket.

GAS TYPE	F	A	B	C
T C S L 1/8"	1/8" GAS	16	7	14
T C S L 1/4"	1/4" GAS	20	9	17
T C S L 3/8"	3/8" GAS	19	9	20
T C S L 1/2"	1/2" GAS	19	10	24
T C S L 3/4"	3/4" GAS	24	12	32
T C S L 1"	1" GAS	29	14	40
METRIC TYPE	**F**	**A**	**B**	**C**
T C S L 14 x 1,5	M 14 x 1,5	20	9	17
T C S L 16 x 1,5	M 16 x 1,5	19	9	22
T C S L 18 x 1,5	M 18 x 1,5	19	9	22
T C S L 20 x 1,5	M 20 x 1,5	22	10	24
T C S L 22 x 1,5	M 22 x 1,5	20	10	27

TCSL/P

OIL FILLER AND BREATHER CAPS WITH LABYRINTH AND SINTERED WASHER

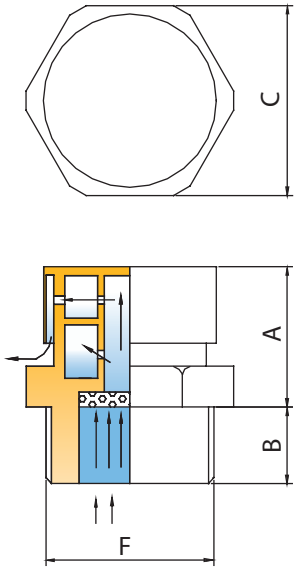



This range of oil breather caps has the same constructional characteristics as the TCSL, with the addition of a sintered bronze washer in the bottom part of the vent chamber, making it suitable for a "heavier duty" and therefore suitable for: reduction units, overdrives, building machinery, road machinery, etc.

GAS TYPE	F	A	B	C
T C S L / P 1/8"	1/8" GAS	16	7	14
T C S L / P 1/4"	1/4" GAS	20	9	17
T C S L / P 3/8"	3/8" GAS	19	9	20
T C S L / P 1/2"	1/2" GAS	19	10	24
T C S L / P 3/4"	3/4" GAS	24	12	32
T C S L / P 1"	1" GAS	29	14	40
METRIC TYPE	**F**	**A**	**B**	**C**
T C S L / P 12 x 1,5	M 12 x 1,5	20	9	17
T C S L / P 14 x 1,5	M 14 x 1,5	20	9	17
T C S L / P 16 x 1,5	M 16 x 1,5	19	9	22
T C S L / P 18 x 1,5	M 18 x 1,5	19	9	22
T C S L / P 20 x 1,5	M 20 x 1,5	22	10	24
T C S L / P 22 x 1,5	M 22 x 1,5	20	10	27

- Body in brass OT 58.
- Oilproof gasket.